



REUSE OF DOCUMENT
 This document is the property of
 DHM Design Corp. The ideas
 and design incorporated on this
 document are instruments of
 professional service and shall not
 be used for any other project
 without written authorization of
 DHM Design Corp.

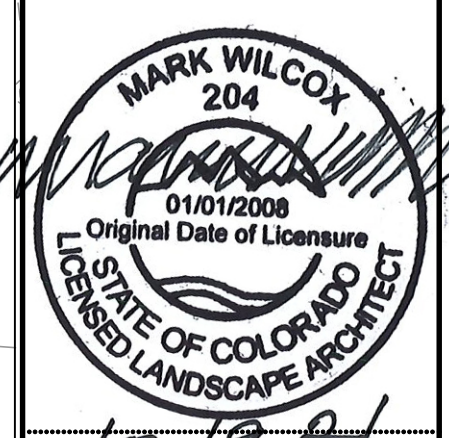

10.19.21

ADCO 124th Ave Roundabout
 Adams County, CO

PROJECT NUMBER:	DATE:
DESIGNED: MW	2021-10-14
DRAWN: KW	
CHECKED: MW	
REVISIONS:	2021.10.29
JOB DESCRIPTION:	
100% CD	
SET	
SHEET TITLE:	
MATERIAL	
ENLARGEMENT PLAN	
SCALE: 1"=10'-0"	
SHEET NUMBER:	
L706X	
SHEET 4 OF 8	

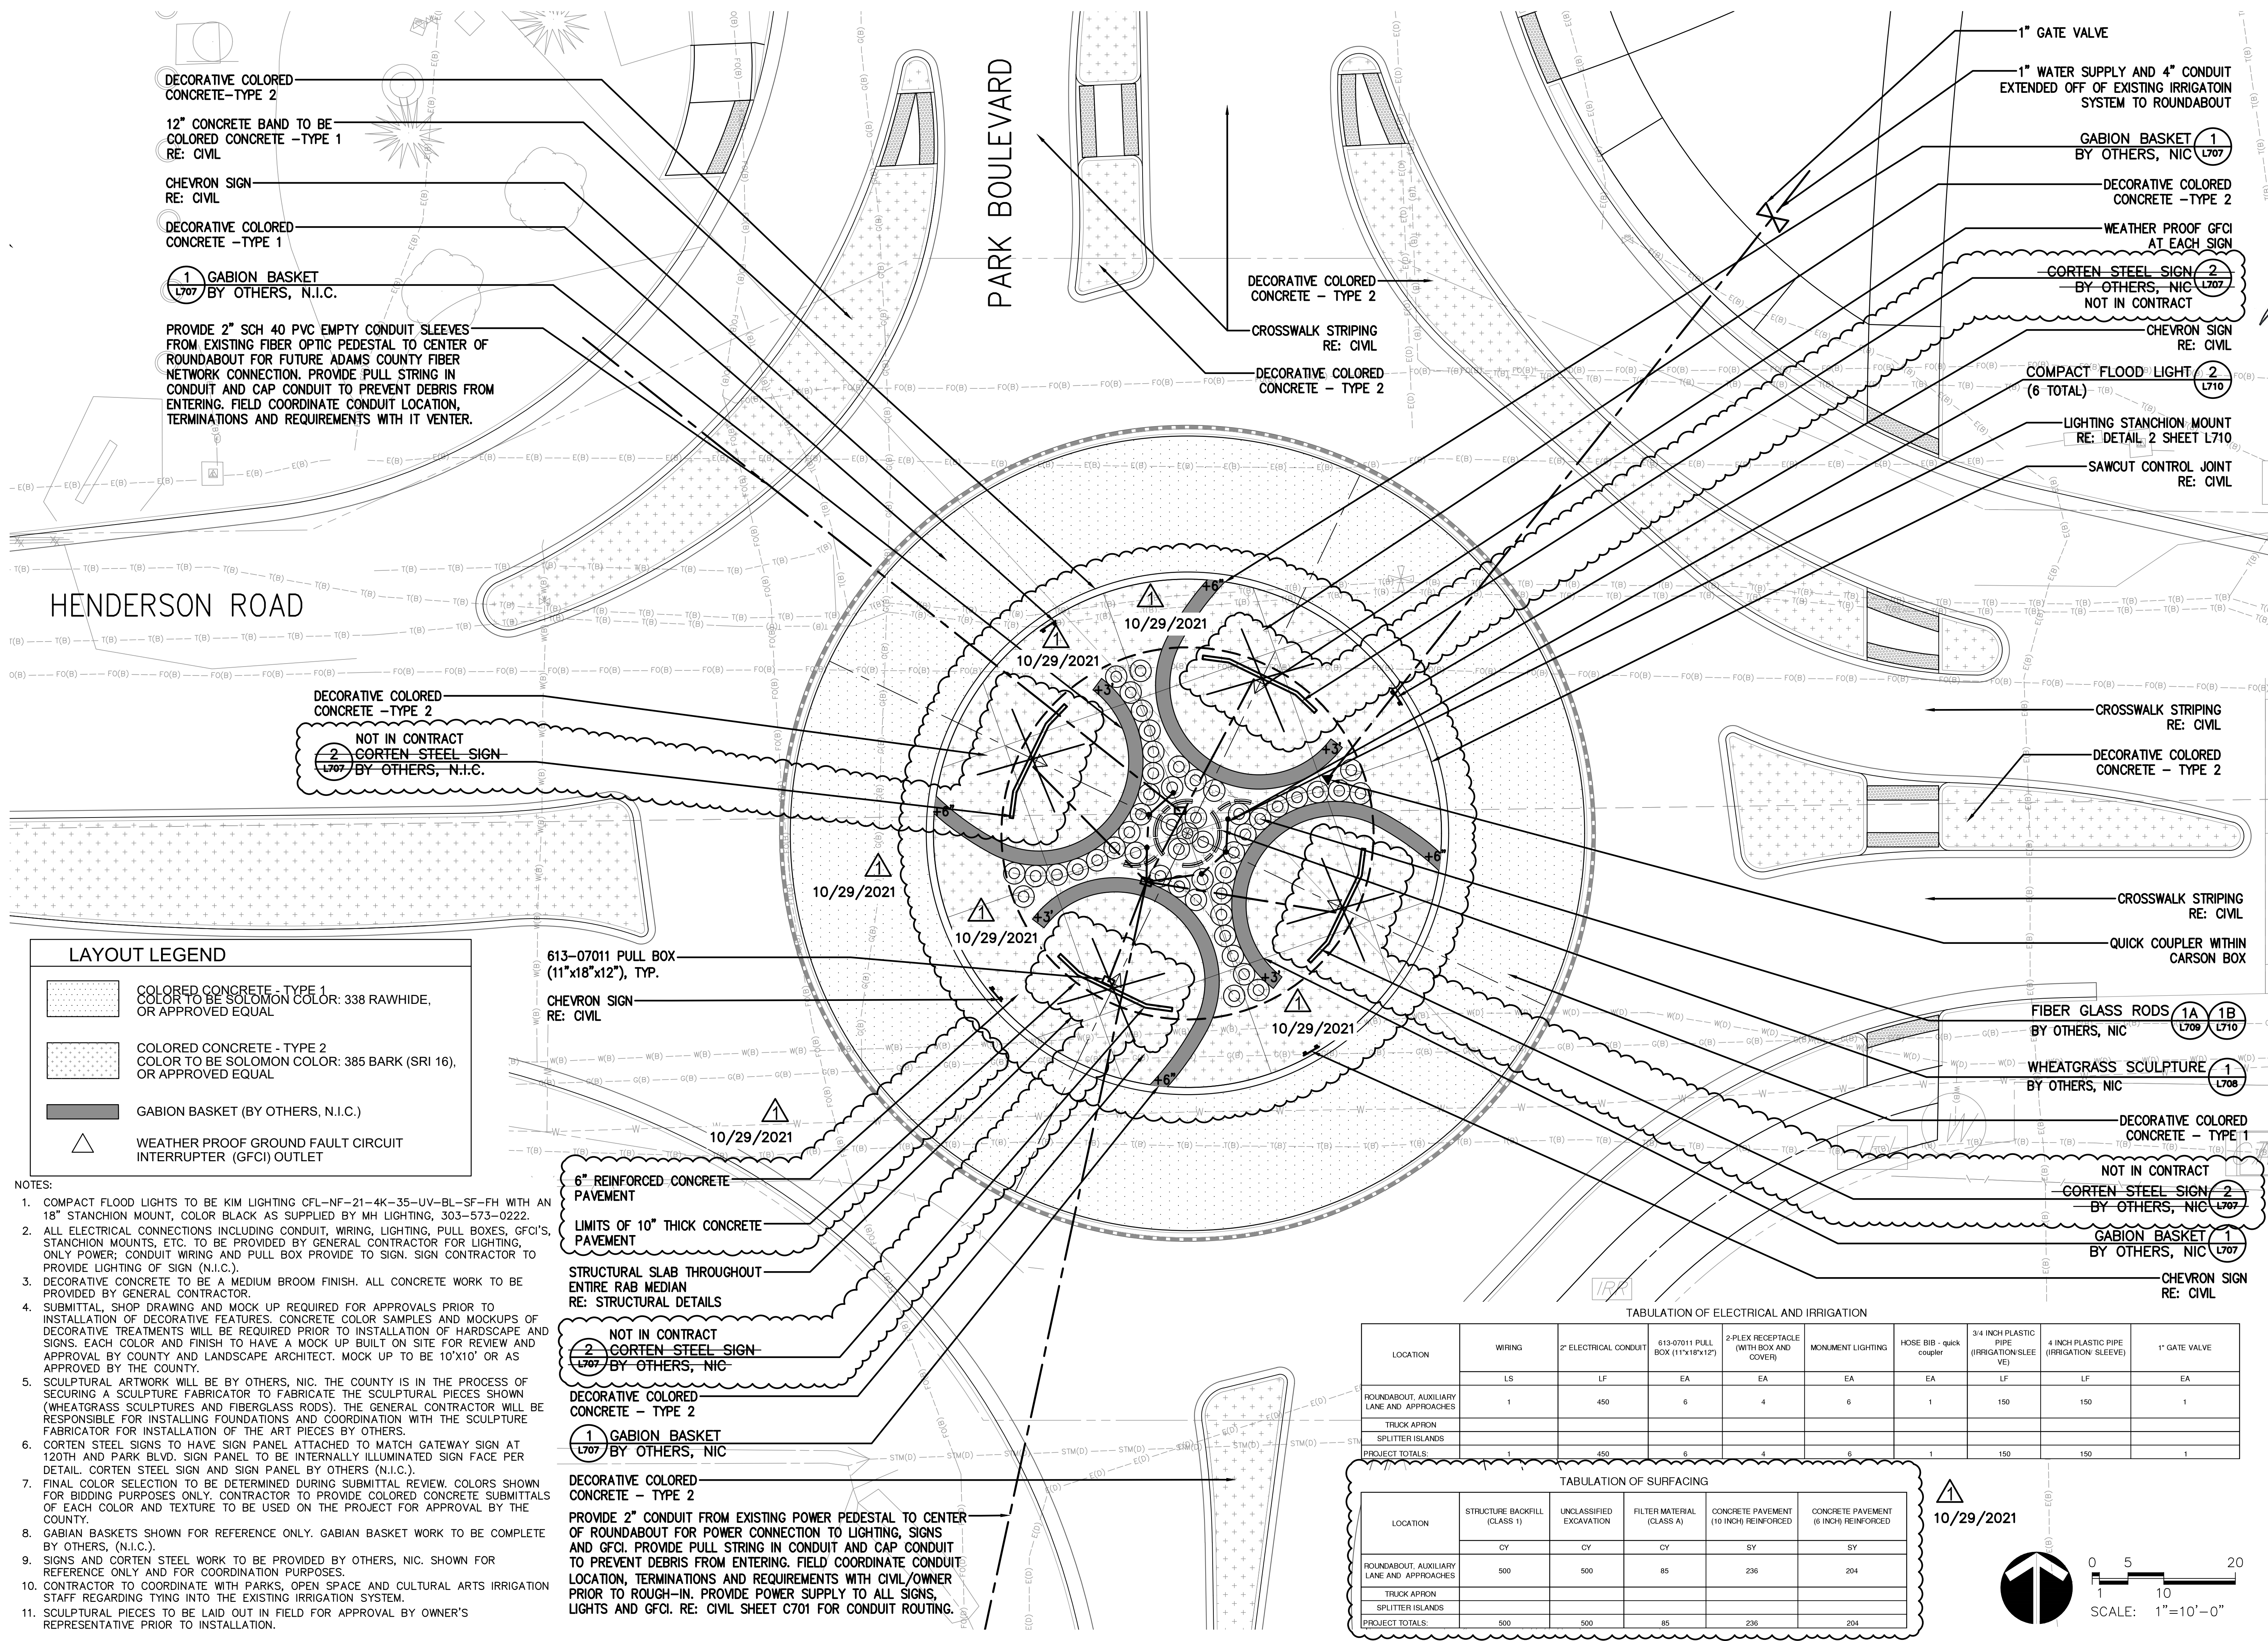

- DECORATIVE COLORED CONCRETE - TYPE 2
- 12" CONCRETE BAND TO BE COLORED CONCRETE - TYPE 1 RE: CIVIL
- CHEVRON SIGN RE: CIVIL
- DECORATIVE COLORED CONCRETE - TYPE 1
- 1 GABION BASKET BY OTHERS, N.I.C.

PROVIDE 2" SCH 40 PVC EMPTY CONDUIT SLEEVES FROM EXISTING FIBER OPTIC PEDESTAL TO CENTER OF ROUNDABOUT FOR FUTURE ADAMS COUNTY FIBER NETWORK CONNECTION. PROVIDE PULL STRING IN CONDUIT AND CAP CONDUIT TO PREVENT DEBRIS FROM ENTERING. FIELD COORDINATE CONDUIT LOCATION, TERMINATIONS AND REQUIREMENTS WITH IT VENTER.

HENDERSON ROAD

PARK BOULEVARD

LAYOUT LEGEND

- COLORED CONCRETE - TYPE 1
 COLOR TO BE SOLOMON COLOR: 338 RAWHIDE, OR APPROVED EQUAL
- COLORED CONCRETE - TYPE 2
 COLOR TO BE SOLOMON COLOR: 385 BARK (SRI 16), OR APPROVED EQUAL
- GABION BASKET (BY OTHERS, N.I.C.)
- WEATHER PROOF GROUND FAULT CIRCUIT INTERRUPTER (GFCI) OUTLET

- NOTES:**
- COMPACT FLOOD LIGHTS TO BE KIM LIGHTING CFL-NF-21-4K-35-UV-BL-SF-FH WITH AN 18" STANCHION MOUNT, COLOR BLACK AS SUPPLIED BY MH LIGHTING, 303-573-0222.
 - ALL ELECTRICAL CONNECTIONS INCLUDING CONDUIT, WIRING, LIGHTING, PULL BOXES, GFCI'S, STANCHION MOUNTS, ETC. TO BE PROVIDED BY GENERAL CONTRACTOR FOR LIGHTING, ONLY POWER; CONDUIT WIRING AND PULL BOX PROVIDE TO SIGN. SIGN CONTRACTOR TO PROVIDE LIGHTING OF SIGN (N.I.C.).
 - DECORATIVE CONCRETE TO BE A MEDIUM BROOM FINISH. ALL CONCRETE WORK TO BE PROVIDED BY GENERAL CONTRACTOR.
 - SUBMITTAL, SHOP DRAWING AND MOCK UP REQUIRED FOR APPROVALS PRIOR TO INSTALLATION OF DECORATIVE FEATURES. CONCRETE COLOR SAMPLES AND MOCKUPS OF DECORATIVE TREATMENTS WILL BE REQUIRED PRIOR TO INSTALLATION OF HARDSCAPE AND SIGNS. EACH COLOR AND FINISH TO HAVE A MOCK UP BUILT ON SITE FOR REVIEW AND APPROVAL BY COUNTY AND LANDSCAPE ARCHITECT. MOCK UP TO BE 10'X10' OR AS APPROVED BY THE COUNTY.
 - SCULPTURAL ARTWORK WILL BE BY OTHERS, N.I.C. THE COUNTY IS IN THE PROCESS OF SECURING A SCULPTURE FABRICATOR TO FABRICATE THE SCULPTURAL PIECES SHOWN (WHEATGRASS SCULPTURES AND FIBERGLASS RODS). THE GENERAL CONTRACTOR WILL BE RESPONSIBLE FOR INSTALLING FOUNDATIONS AND COORDINATION WITH THE SCULPTURE FABRICATOR FOR INSTALLATION OF THE ART PIECES BY OTHERS.
 - CORTEN STEEL SIGNS TO HAVE SIGN PANEL ATTACHED TO MATCH GATEWAY SIGN AT 120TH AND PARK BLVD. SIGN PANEL TO BE INTERNALLY ILLUMINATED SIGN FACE PER DETAIL. CORTEN STEEL SIGN AND SIGN PANEL BY OTHERS (N.I.C.).
 - FINAL COLOR SELECTION TO BE DETERMINED DURING SUBMITTAL REVIEW. COLORS SHOWN FOR BIDDING PURPOSES ONLY. CONTRACTOR TO PROVIDE COLORED CONCRETE SUBMITTALS OF EACH COLOR AND TEXTURE TO BE USED ON THE PROJECT FOR APPROVAL BY THE COUNTY.
 - GABIAN BASKETS SHOWN FOR REFERENCE ONLY. GABIAN BASKET WORK TO BE COMPLETE BY OTHERS, (N.I.C.).
 - SIGNS AND CORTEN STEEL WORK TO BE PROVIDED BY OTHERS, N.I.C. SHOWN FOR REFERENCE ONLY AND FOR COORDINATION PURPOSES.
 - CONTRACTOR TO COORDINATE WITH PARKS, OPEN SPACE AND CULTURAL ARTS IRRIGATION STAFF REGARDING TYING INTO THE EXISTING IRRIGATION SYSTEM.
 - SCULPTURAL PIECES TO BE LAID OUT IN FIELD FOR APPROVAL BY OWNER'S REPRESENTATIVE PRIOR TO INSTALLATION.


- 6" REINFORCED CONCRETE PAVEMENT
- LIMITS OF 10" THICK CONCRETE PAVEMENT
- STRUCTURAL SLAB THROUGHOUT ENTIRE RAB MEDIAN RE: STRUCTURAL DETAILS
- NOT IN CONTRACT 2 CORTEN STEEL SIGN BY OTHERS, N.I.C.
- DECORATIVE COLORED CONCRETE - TYPE 2
- 1 GABION BASKET BY OTHERS, N.I.C.
- DECORATIVE COLORED CONCRETE - TYPE 2
- PROVIDE 2" CONDUIT FROM EXISTING POWER PEDESTAL TO CENTER OF ROUNDABOUT FOR POWER CONNECTION TO LIGHTING, SIGNS AND GFCI. PROVIDE PULL STRING IN CONDUIT AND CAP CONDUIT TO PREVENT DEBRIS FROM ENTERING. FIELD COORDINATE CONDUIT LOCATION, TERMINATIONS AND REQUIREMENTS WITH CIVIL/OWNER PRIOR TO ROUGH-IN. PROVIDE POWER SUPPLY TO ALL SIGNS, LIGHTS AND GFCI. RE: CIVIL SHEET C701 FOR CONDUIT ROUTING.


TABULATION OF ELECTRICAL AND IRRIGATION

LOCATION	WIRING	2" ELECTRICAL CONDUIT	613-07011 PULL BOX (11"X18"X12")	2-PLEX RECEPTACLE (WITH BOX AND COVER)	MONUMENT LIGHTING	HOSE BIB - quick coupler	3/4 INCH PLASTIC PIPE (IRRIGATION SLEEVE)	4 INCH PLASTIC PIPE (IRRIGATION SLEEVE)	1" GATE VALVE
	LS	LF	EA	EA	EA	EA	LF	LF	EA
ROUNDABOUT, AUXILIARY LANE AND APPROACHES	1	450	6	4	6	1	150	150	1
TRUCK APRON									
SPLITTER ISLANDS									
PROJECT TOTALS:	1	450	6	4	6	1	150	150	1


TABULATION OF SURFACING

LOCATION	STRUCTURE BACKFILL (CLASS 1)	UNCLASSIFIED EXCAVATION	FILTER MATERIAL (CLASS A)	CONCRETE PAVEMENT (10 INCH REINFORCED)	CONCRETE PAVEMENT (6 INCH REINFORCED)
	CY	CY	CY	SY	SY
ROUNDABOUT, AUXILIARY LANE AND APPROACHES	500	500	85	236	204
TRUCK APRON					
SPLITTER ISLANDS					
PROJECT TOTALS:	500	500	85	236	204

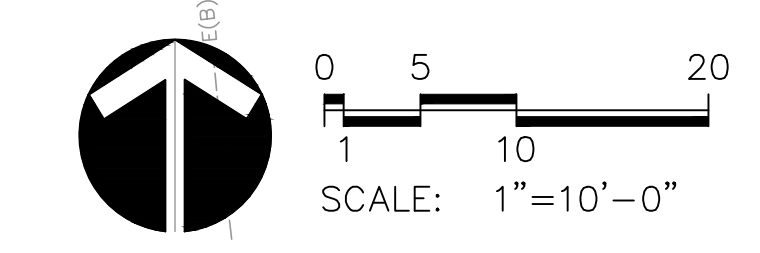

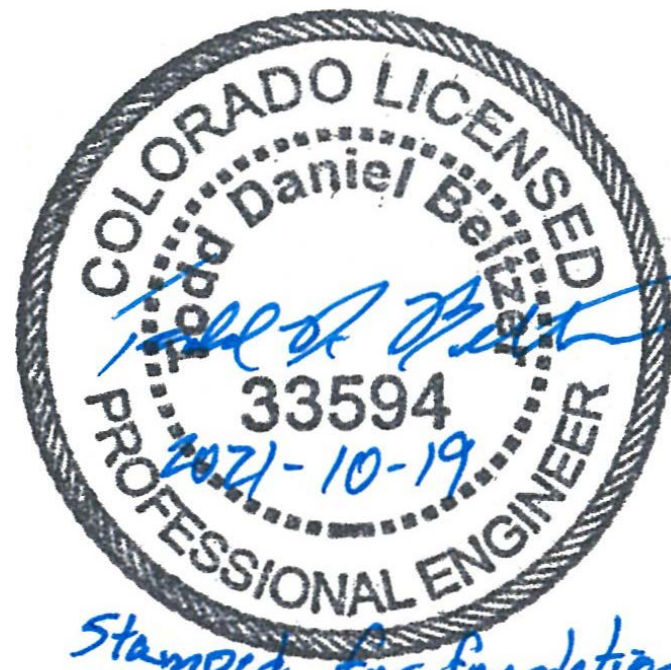


Stamped for foundation design

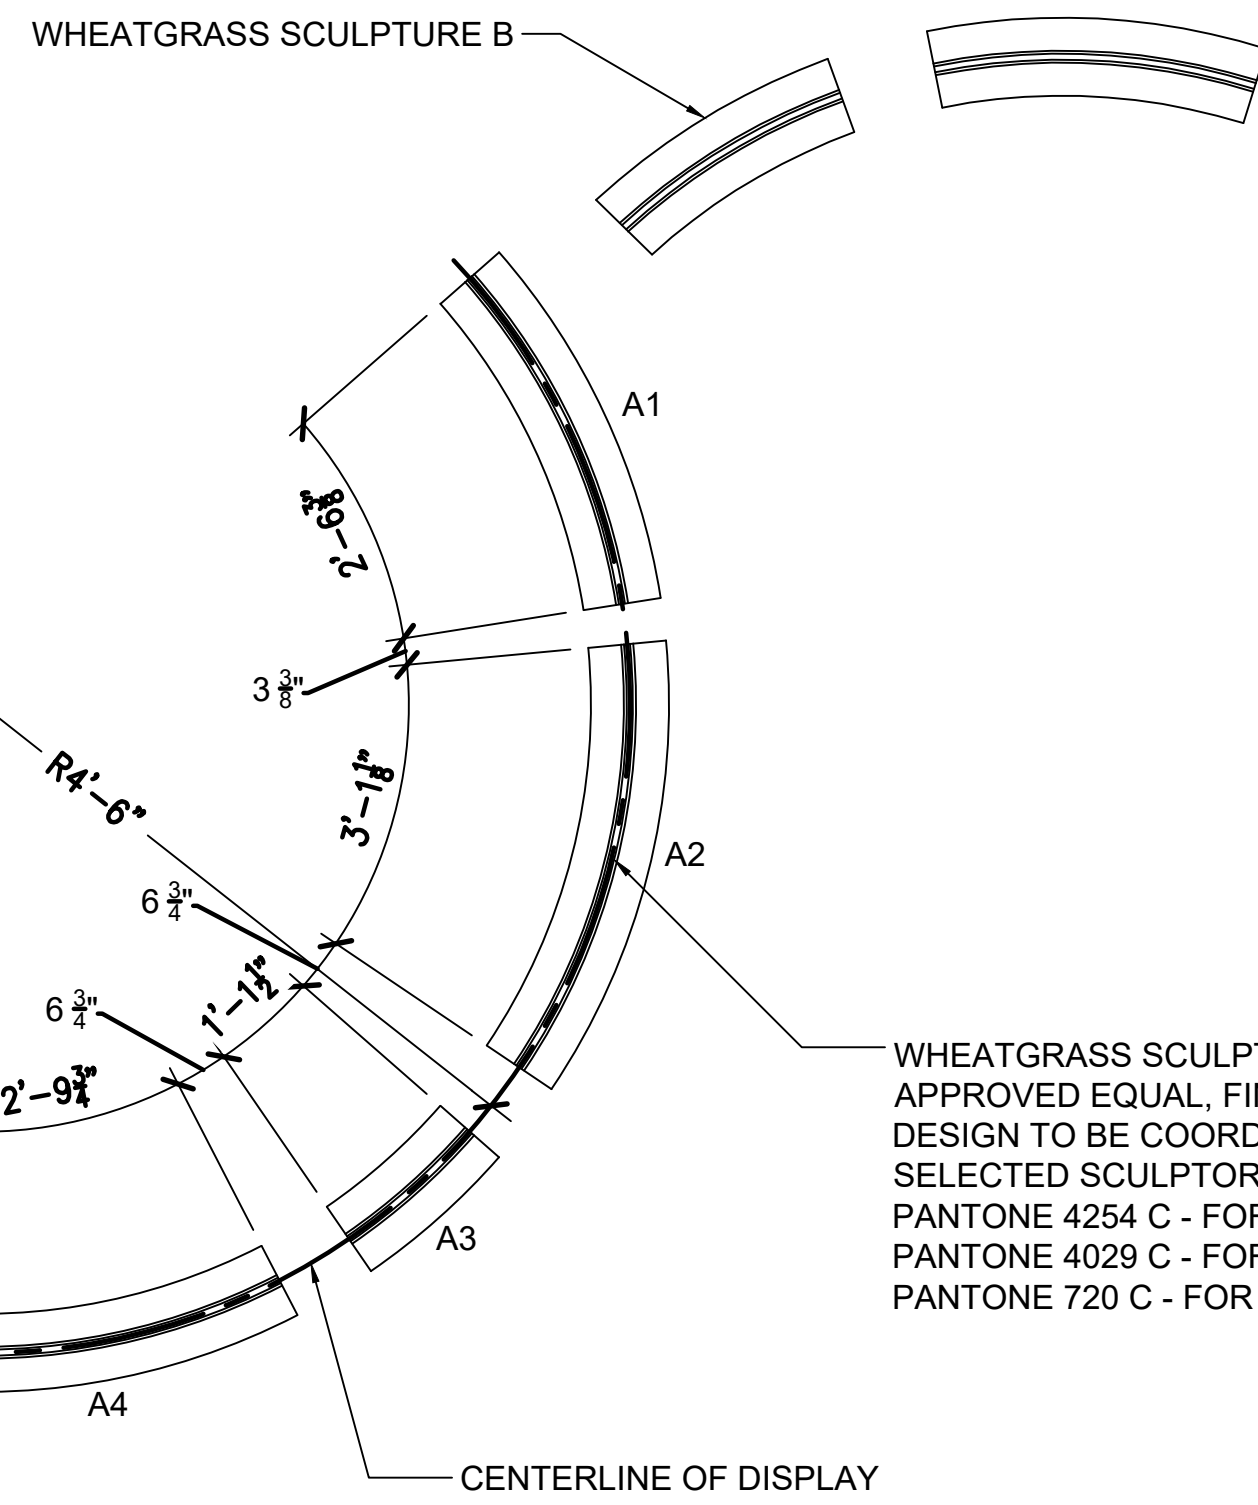

WHEATGRASS SCULPTURE A - PLAN VIEW




WHEATGRASS SCULPTURE PANTONE COLORS
FINAL COLOR SELECTION WILL BE MADE DURING SUBMITTAL REVIEW

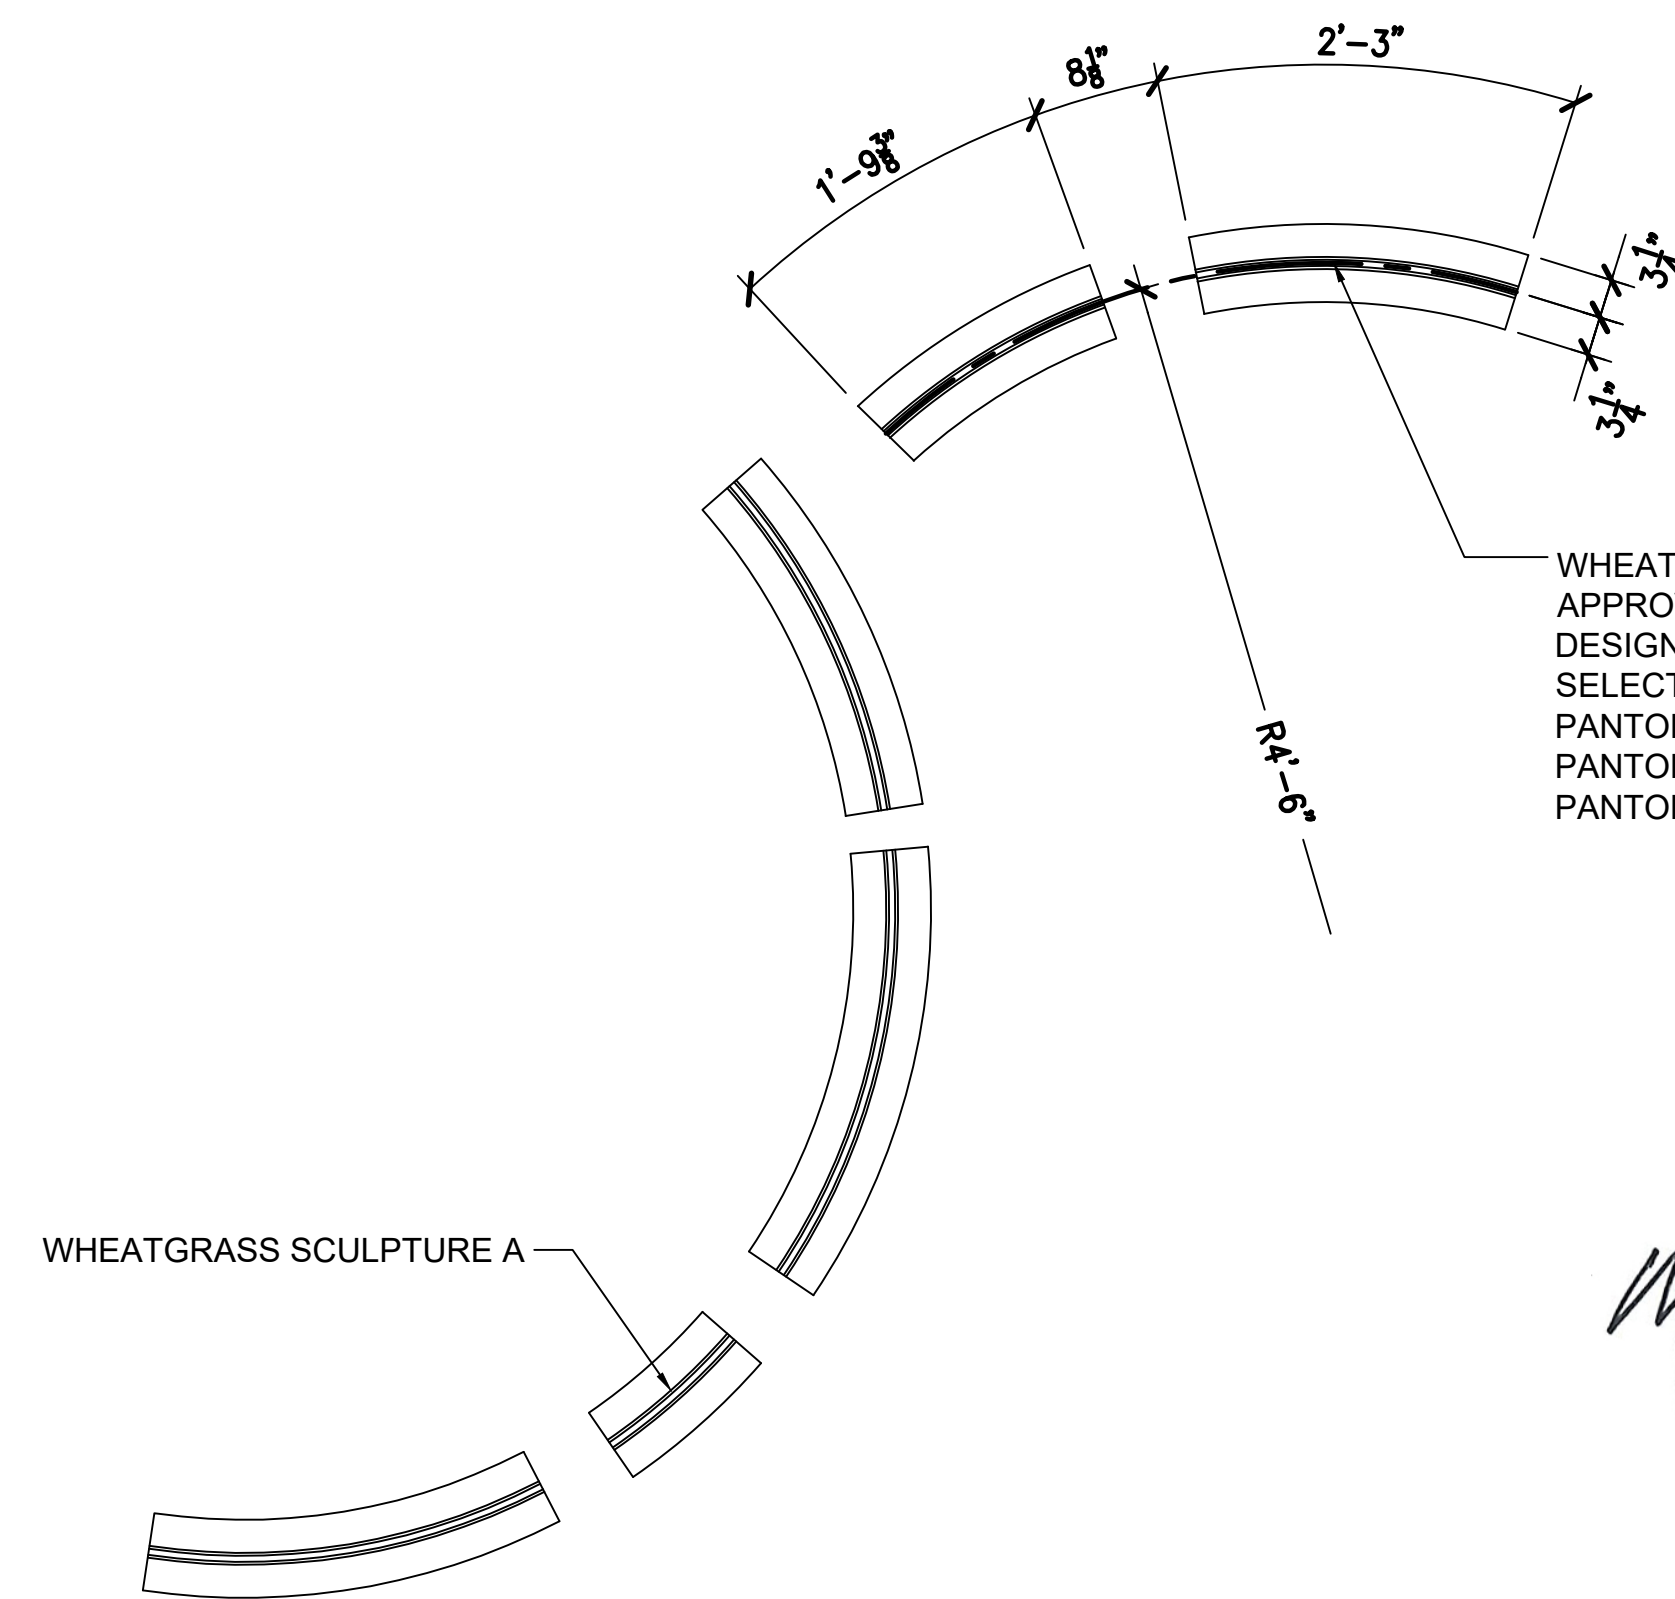


WHEATGRASS SCULPTURE B - PLAN VIEW



WHEATGRASS SCULPTURE - 1/2" STEEL OR APPROVED EQUAL, FINAL MATERIAL AND DESIGN TO BE COORDINATED WITH SELECTED SCULPTOR
PANTONE 4254 C - FOR SEED
PANTONE 4029 C - FOR GRAIN HEAD
PANTONE 720 C - FOR GRASS

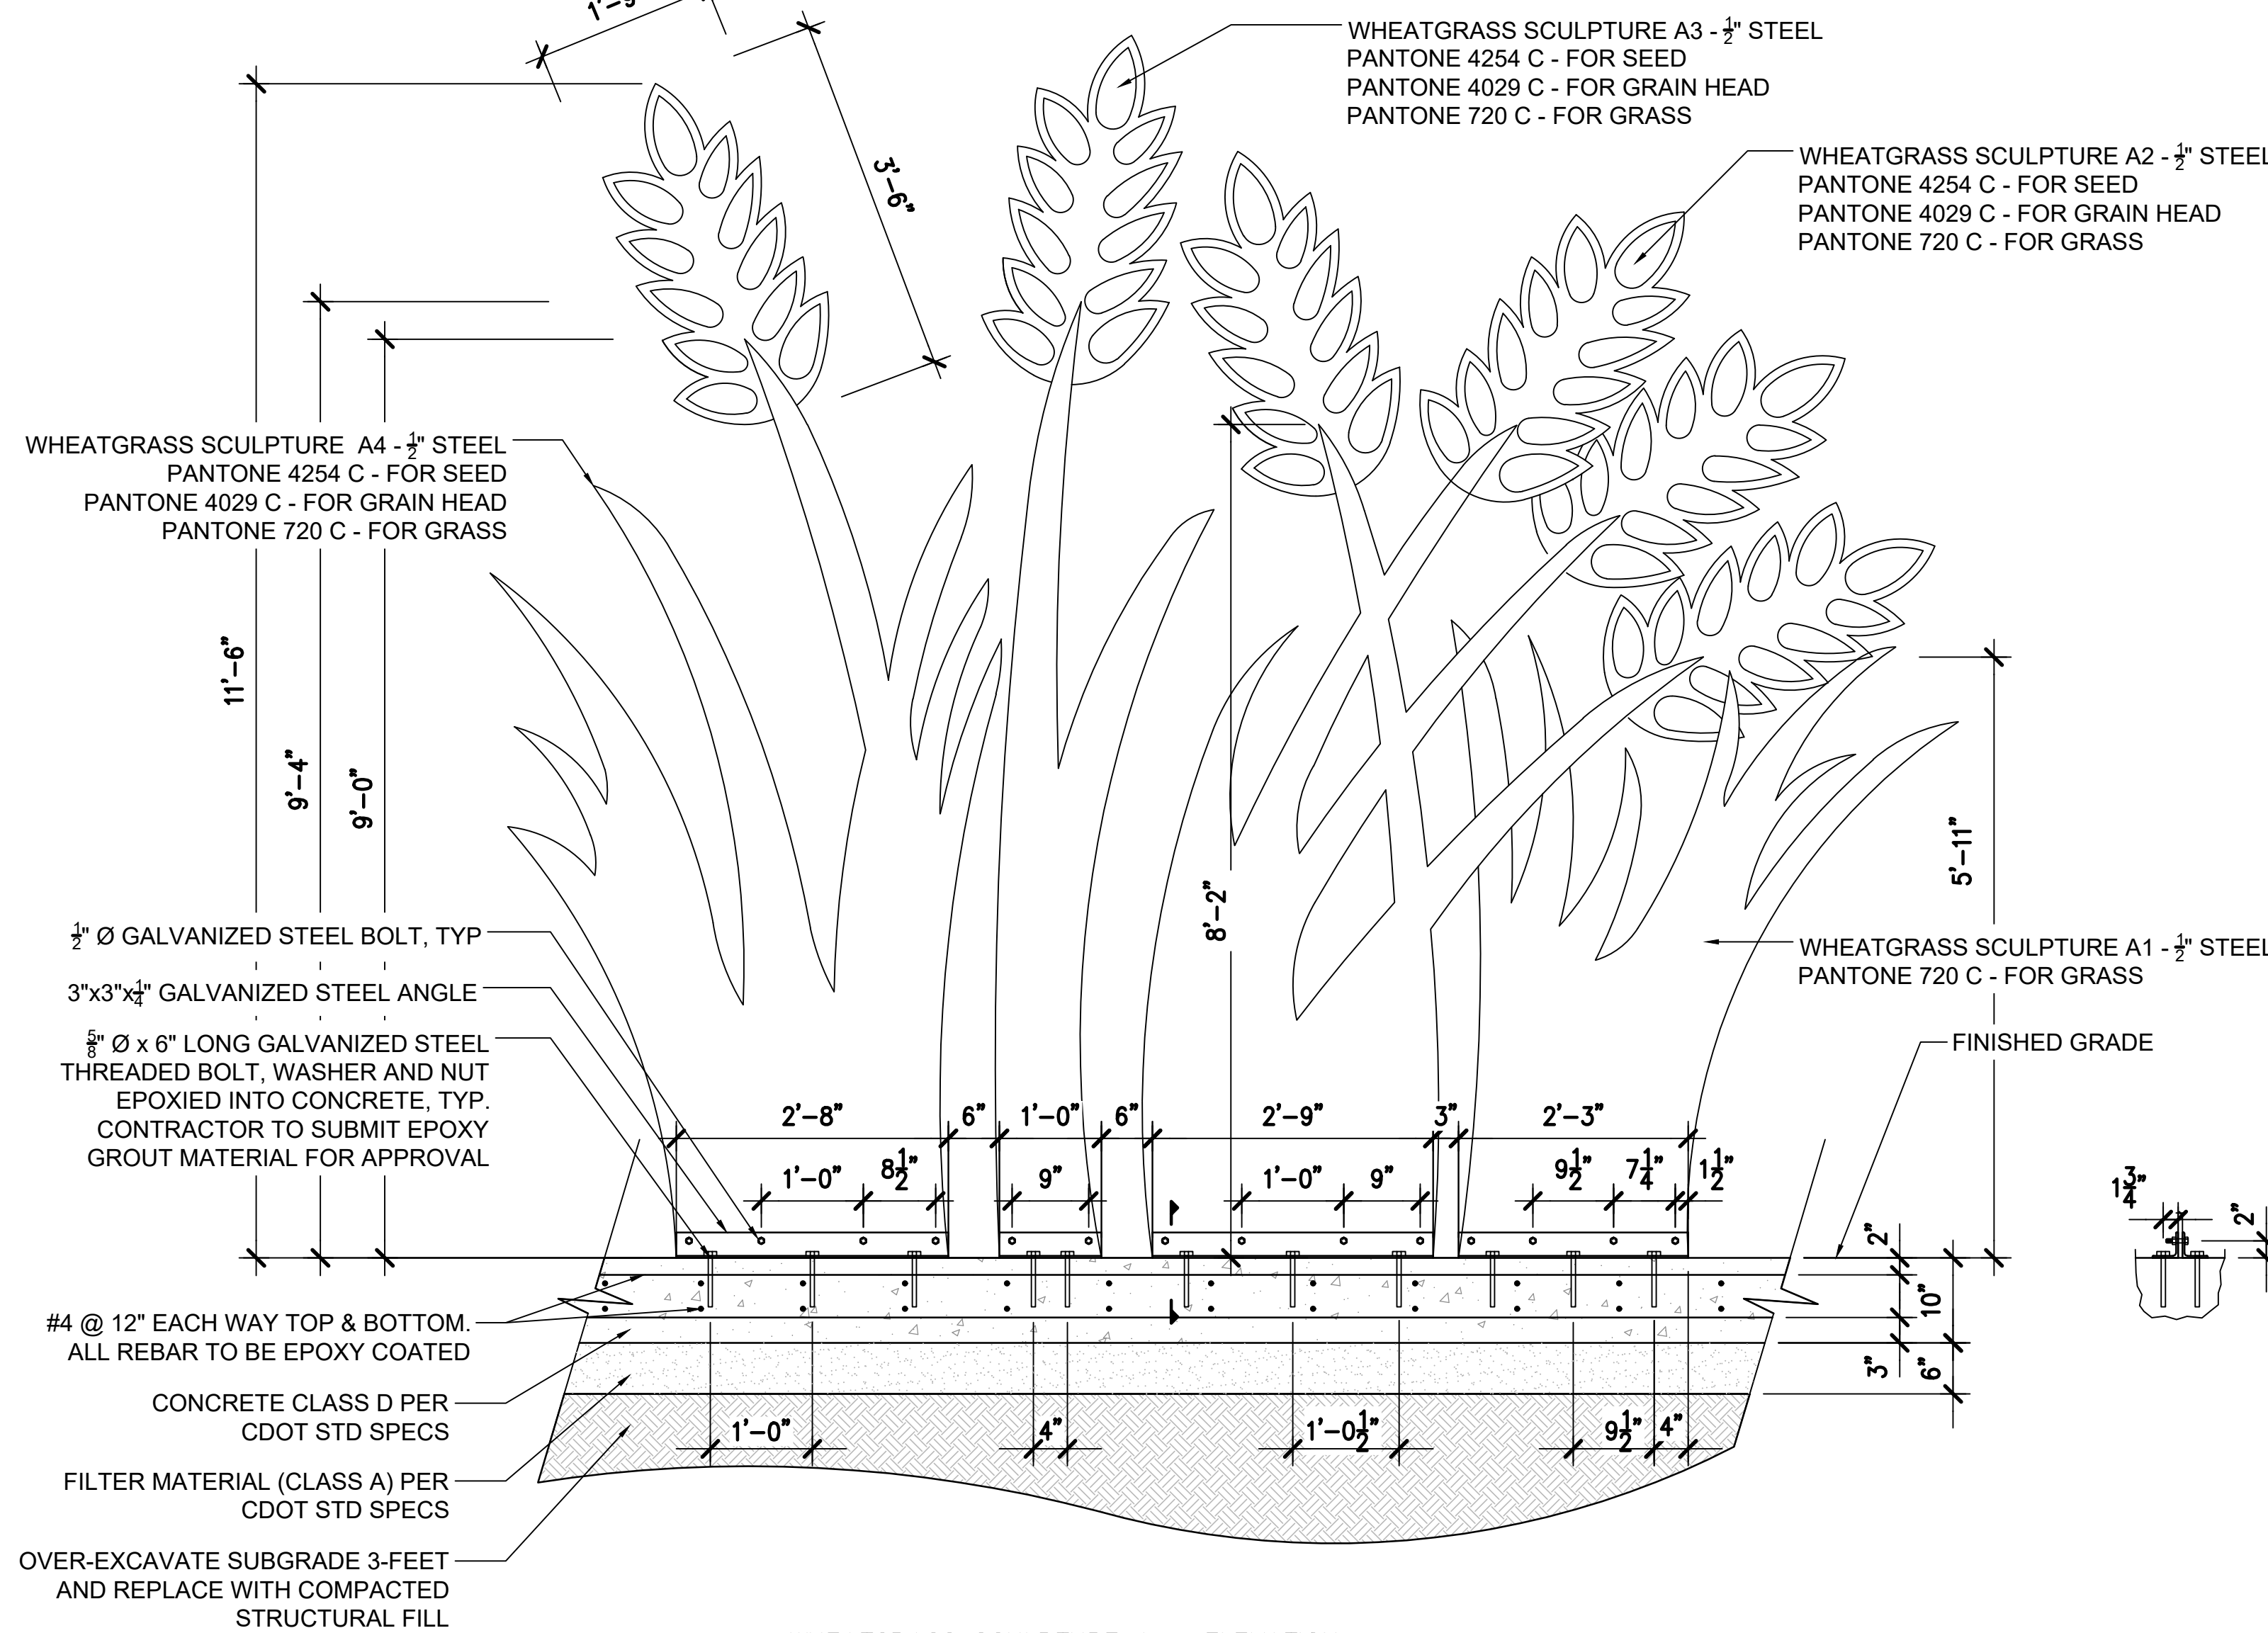

WHEATGRASS SCULPTURE A - ELEVATION

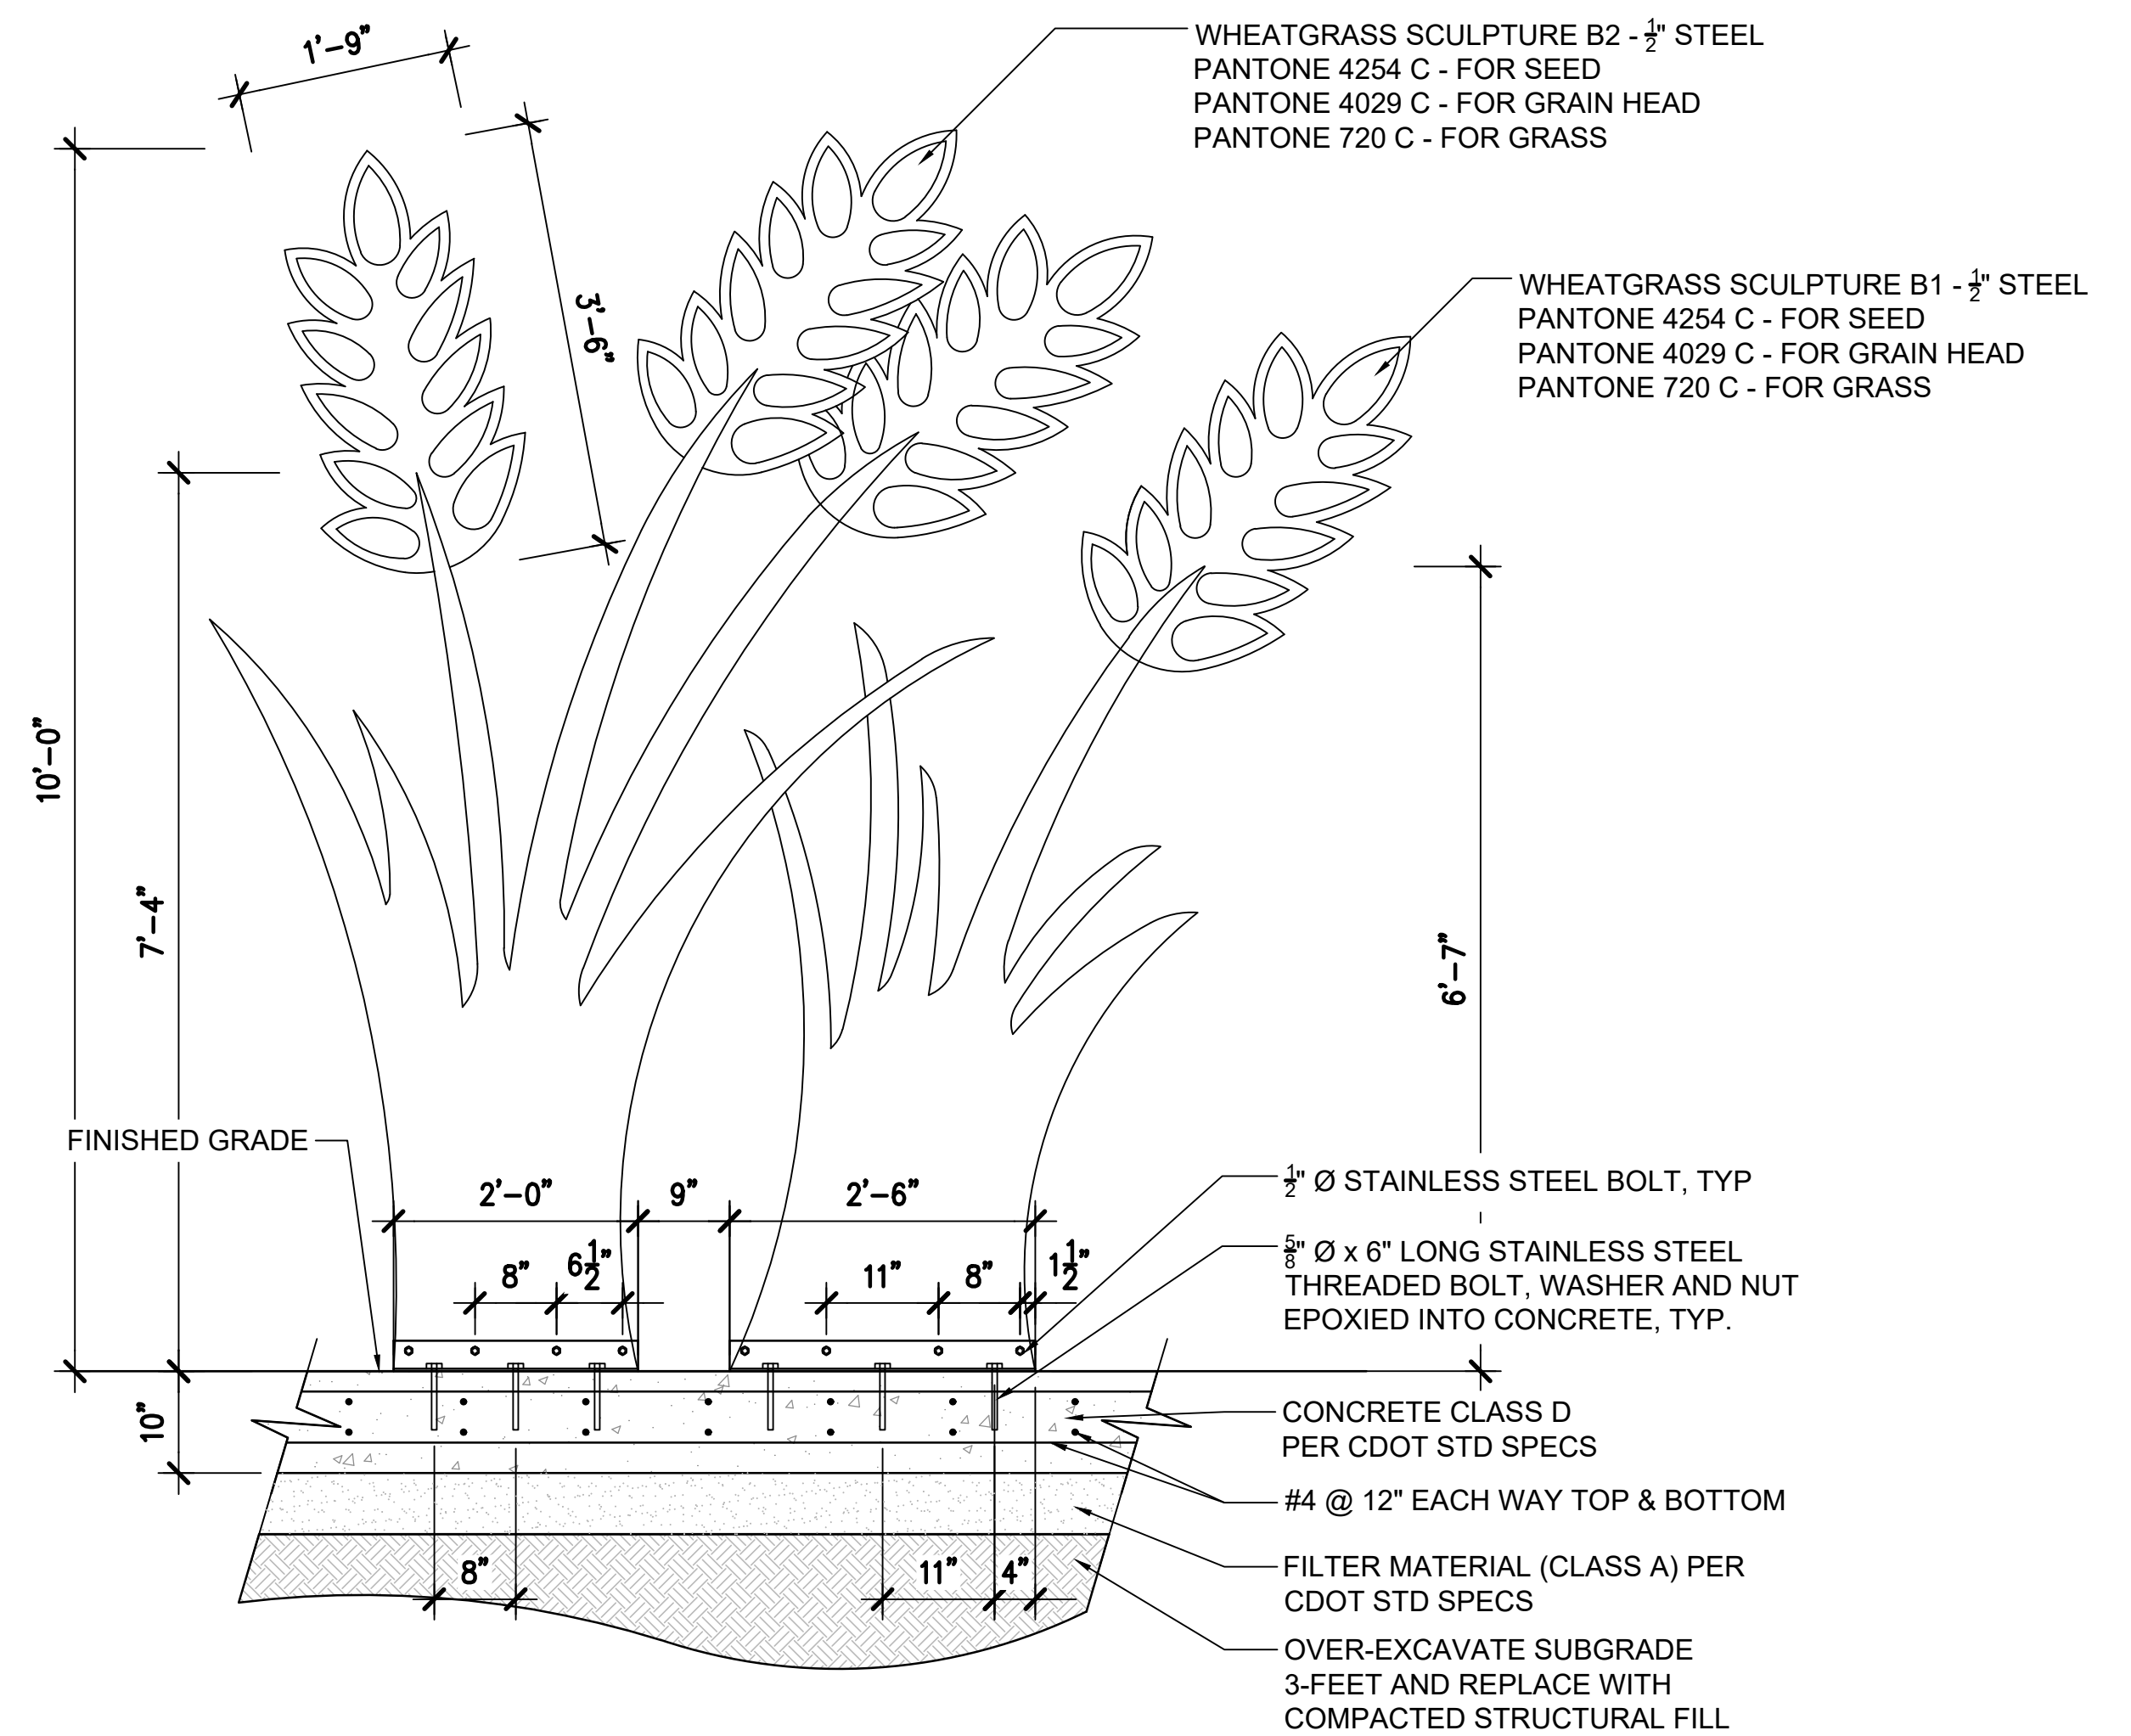

WHEATGRASS SCULPTURE B - ELEVATION

WHEATGRASS SCULPTURE

- WHEATGRASS SCULPTURE BY OTHERS, NIC. SCULPTURE SHOWN FOR INFORMATIONAL PURPOSES ONLY. GENERAL CONTRACTOR TO COORDINATE SCHEDULE AND INSTALLATION OF ART PIECES WITH SELECTED SCULPTURE FABRICATOR. FOUNDATION DESIGNS TO BE INSTALLED BY GENERAL CONTRACTOR PRIOR TO SCULPTURE INSTALLATION.
- GENERAL CONTRACTOR TO PROVIDE FINAL DESIGNS, THICKNESS, ETC. BASED ON COUNTY'S CURRENT BUILDING CODE FOR WIND LOADS, ETC.
- SEE SHEET SD-1 FOR BASIS OF DESIGN MATERIAL PROPERTIES AND CORROSION PROPERTIES FOR STEEL MATERIALS, REINFORCING MATERIALS AND CONCRETE MIX.

SCALE: 3/4" = 1'-0"

REUSE OF DOCUMENT
This document is the property of DhM Design Corp. The ideas and design incorporated on this document are instruments of professional service and shall not be used for any other project without written authorization of DhM Design Corp.

PROJECT NUMBER: DATE: 2021-10-14

DESIGNED: MW
DRAWN: KW
CHECKED: MW

REVISIONS: 2021.10.29

JOB DESCRIPTION:
100% CD
SET

SHEET TITLE:
SITE DETAILS

SCALE:
SHEET NUMBER:

ADCO 124th Ave Roundabout
Adams County, CO

PROJECT NUMBER: DATE
2021-10-14

DESIGNED: MW
DRAWN: KW
CHECKED: MW








REVISIONS: 2021.10.29

JOB DESCRIPTION:
100% CD
SET

SHEET TITLE:
SITE DETAILS

SCALE:
SHEET NUMBER:

L709

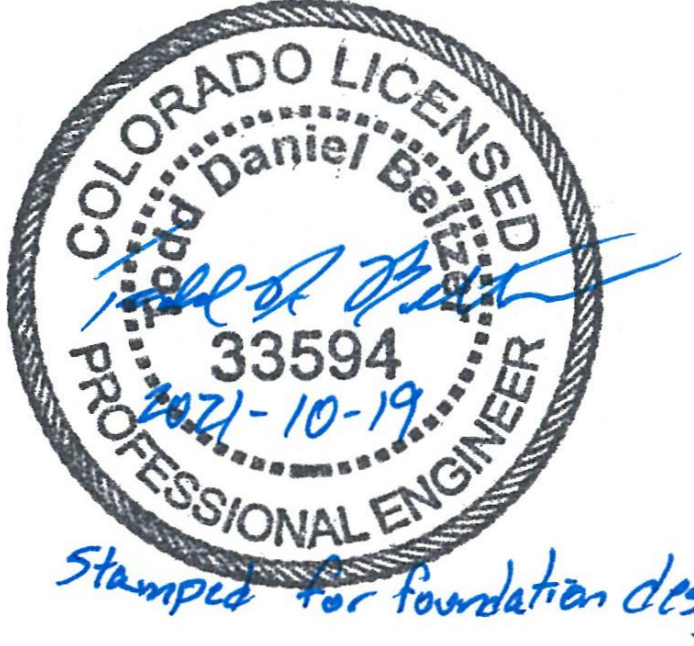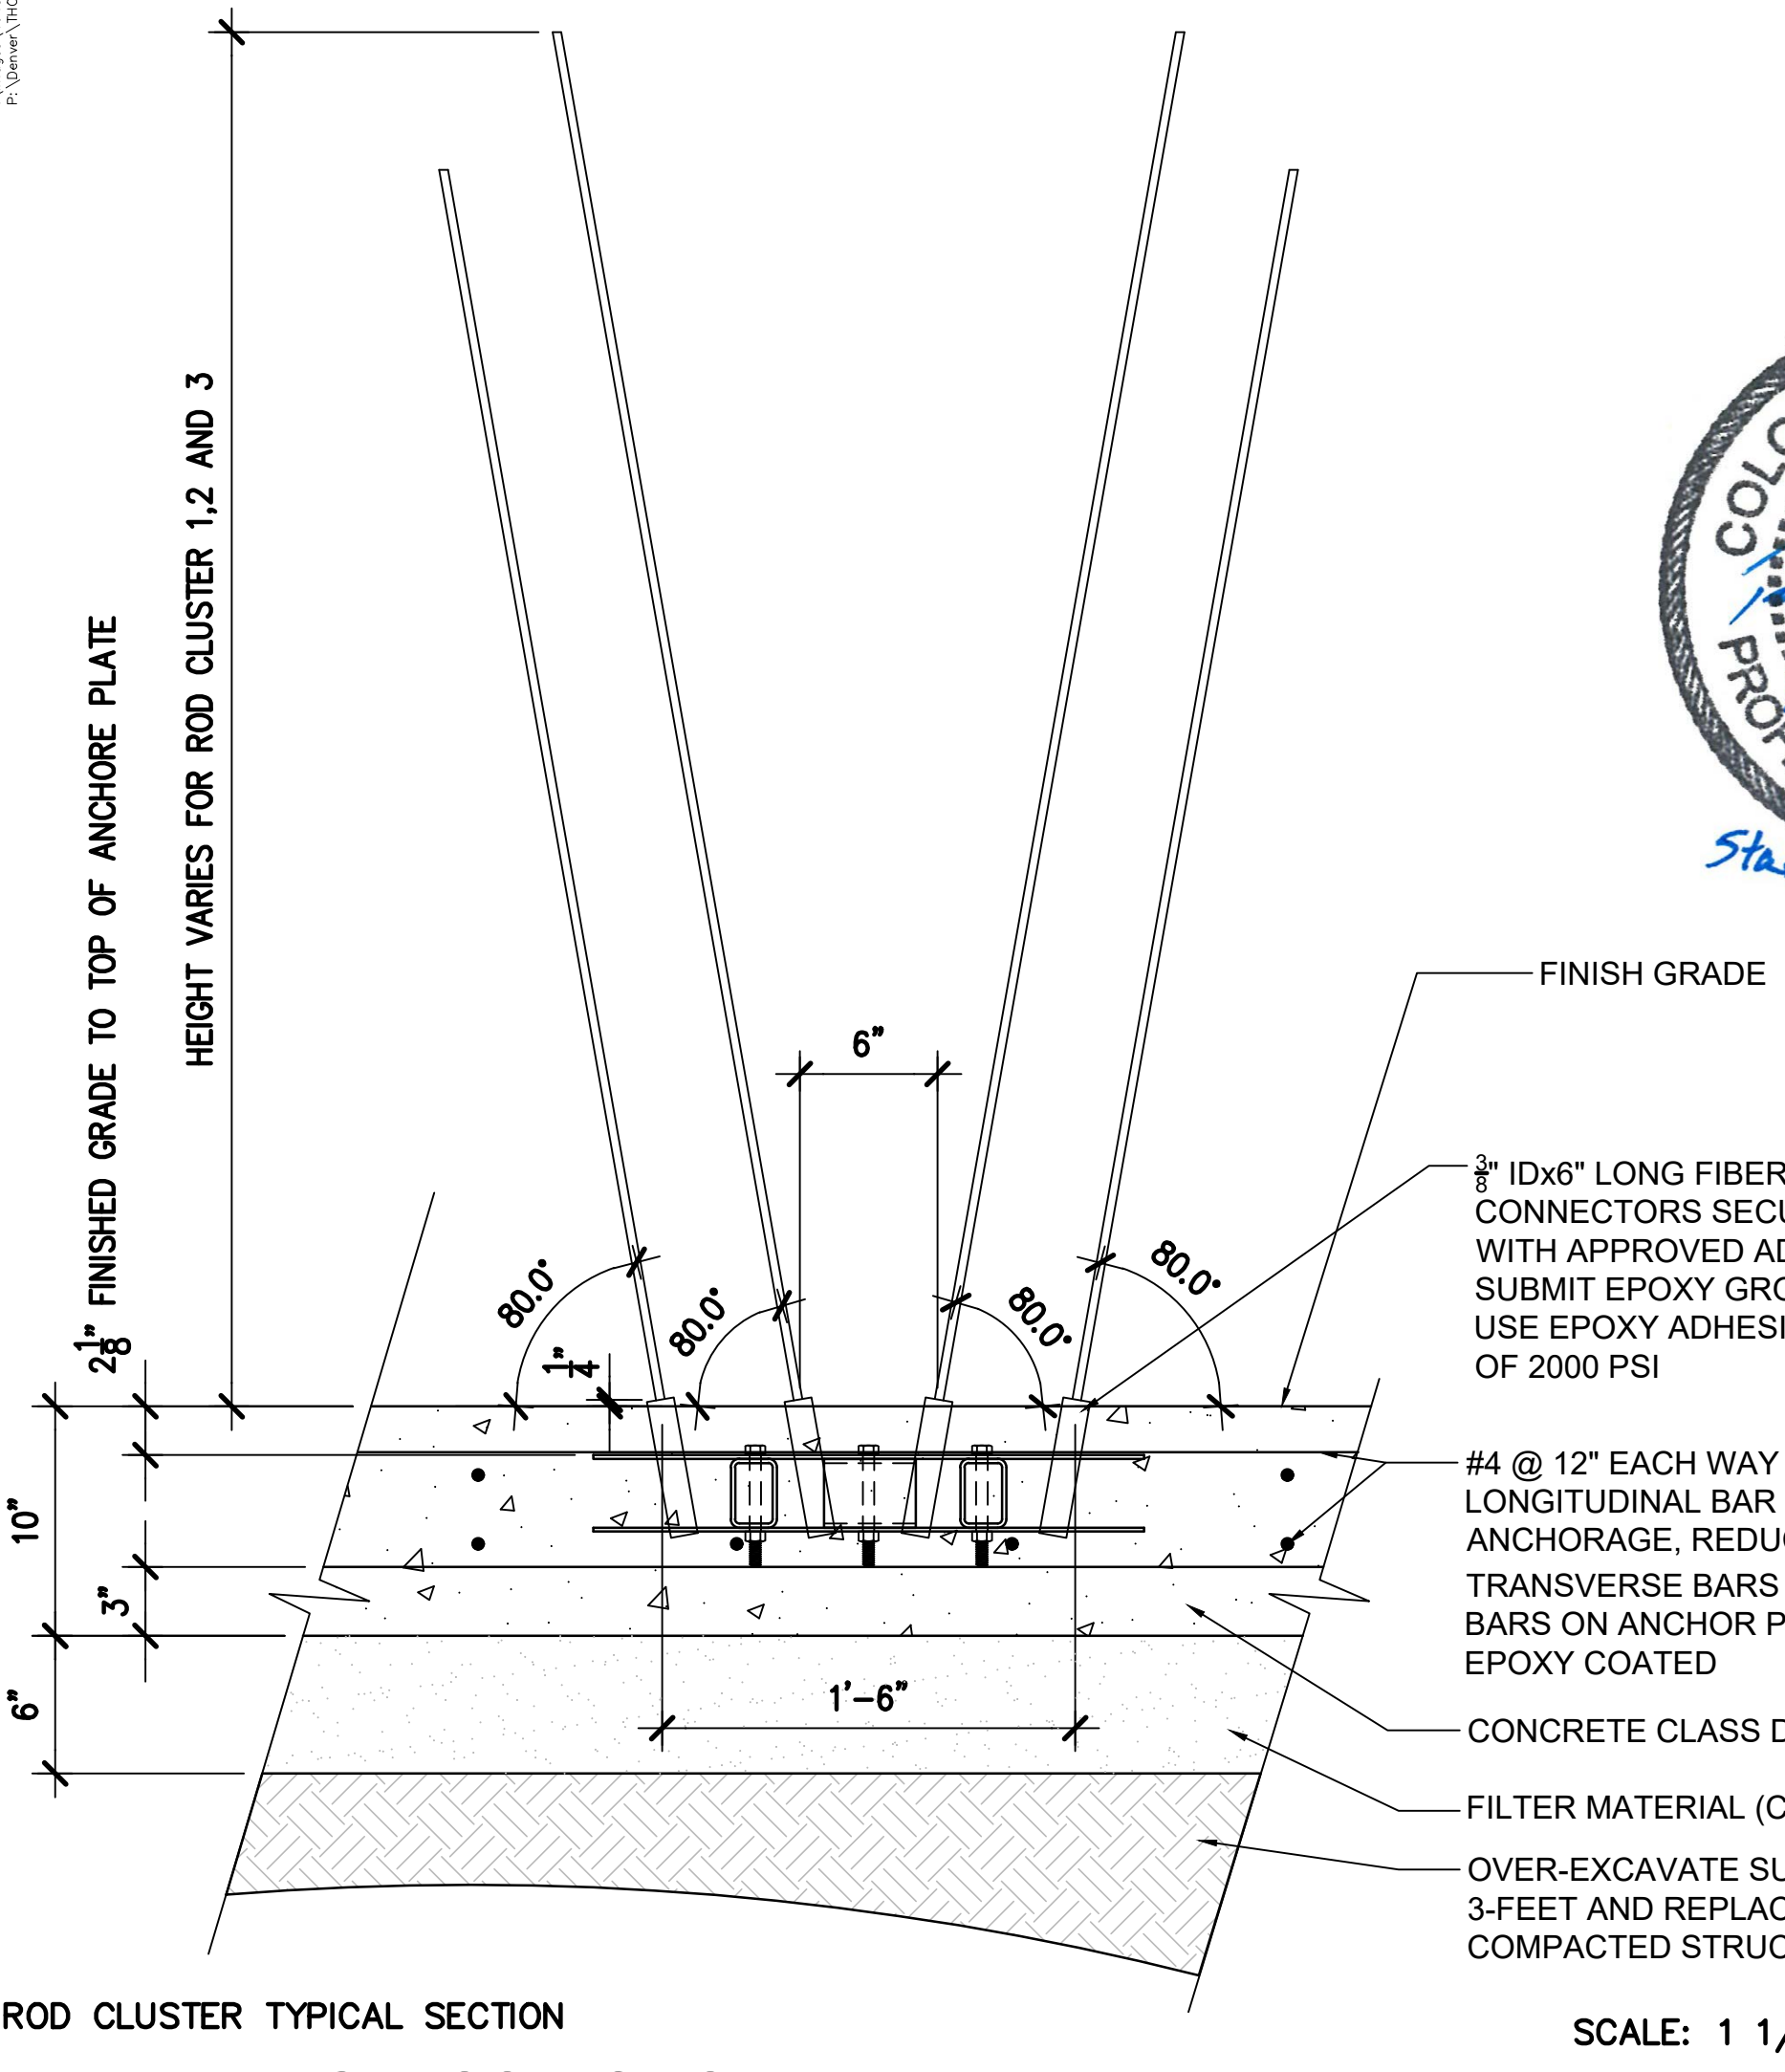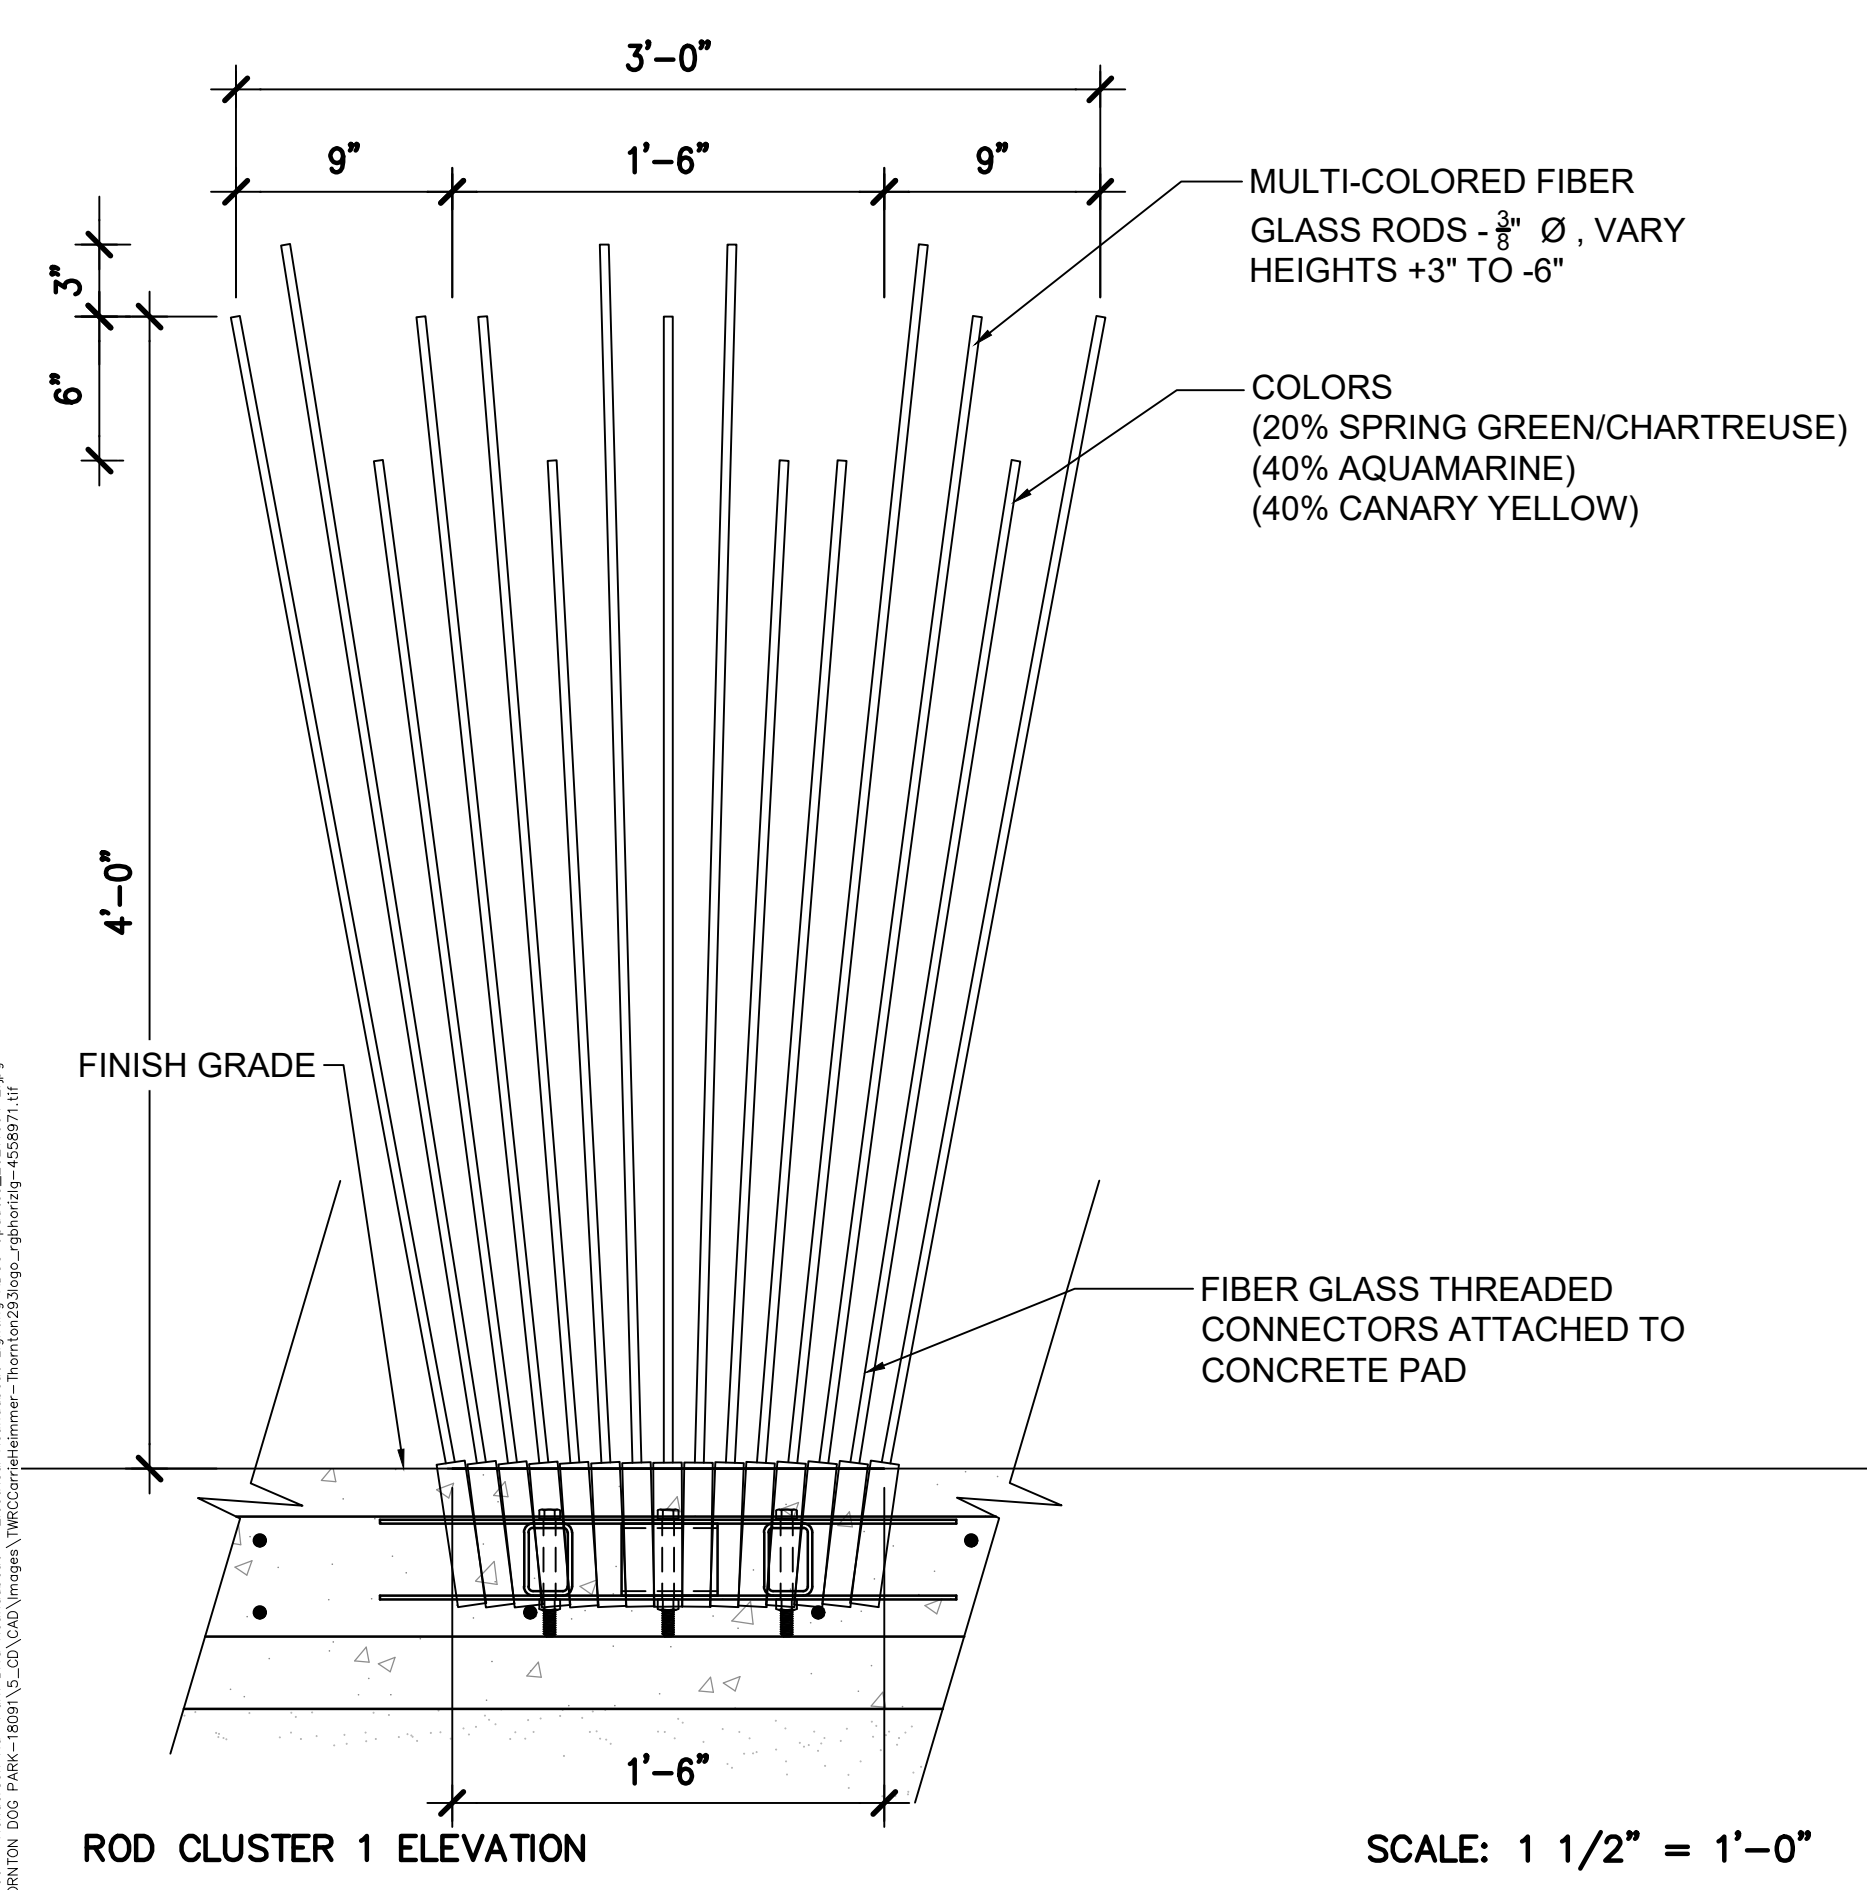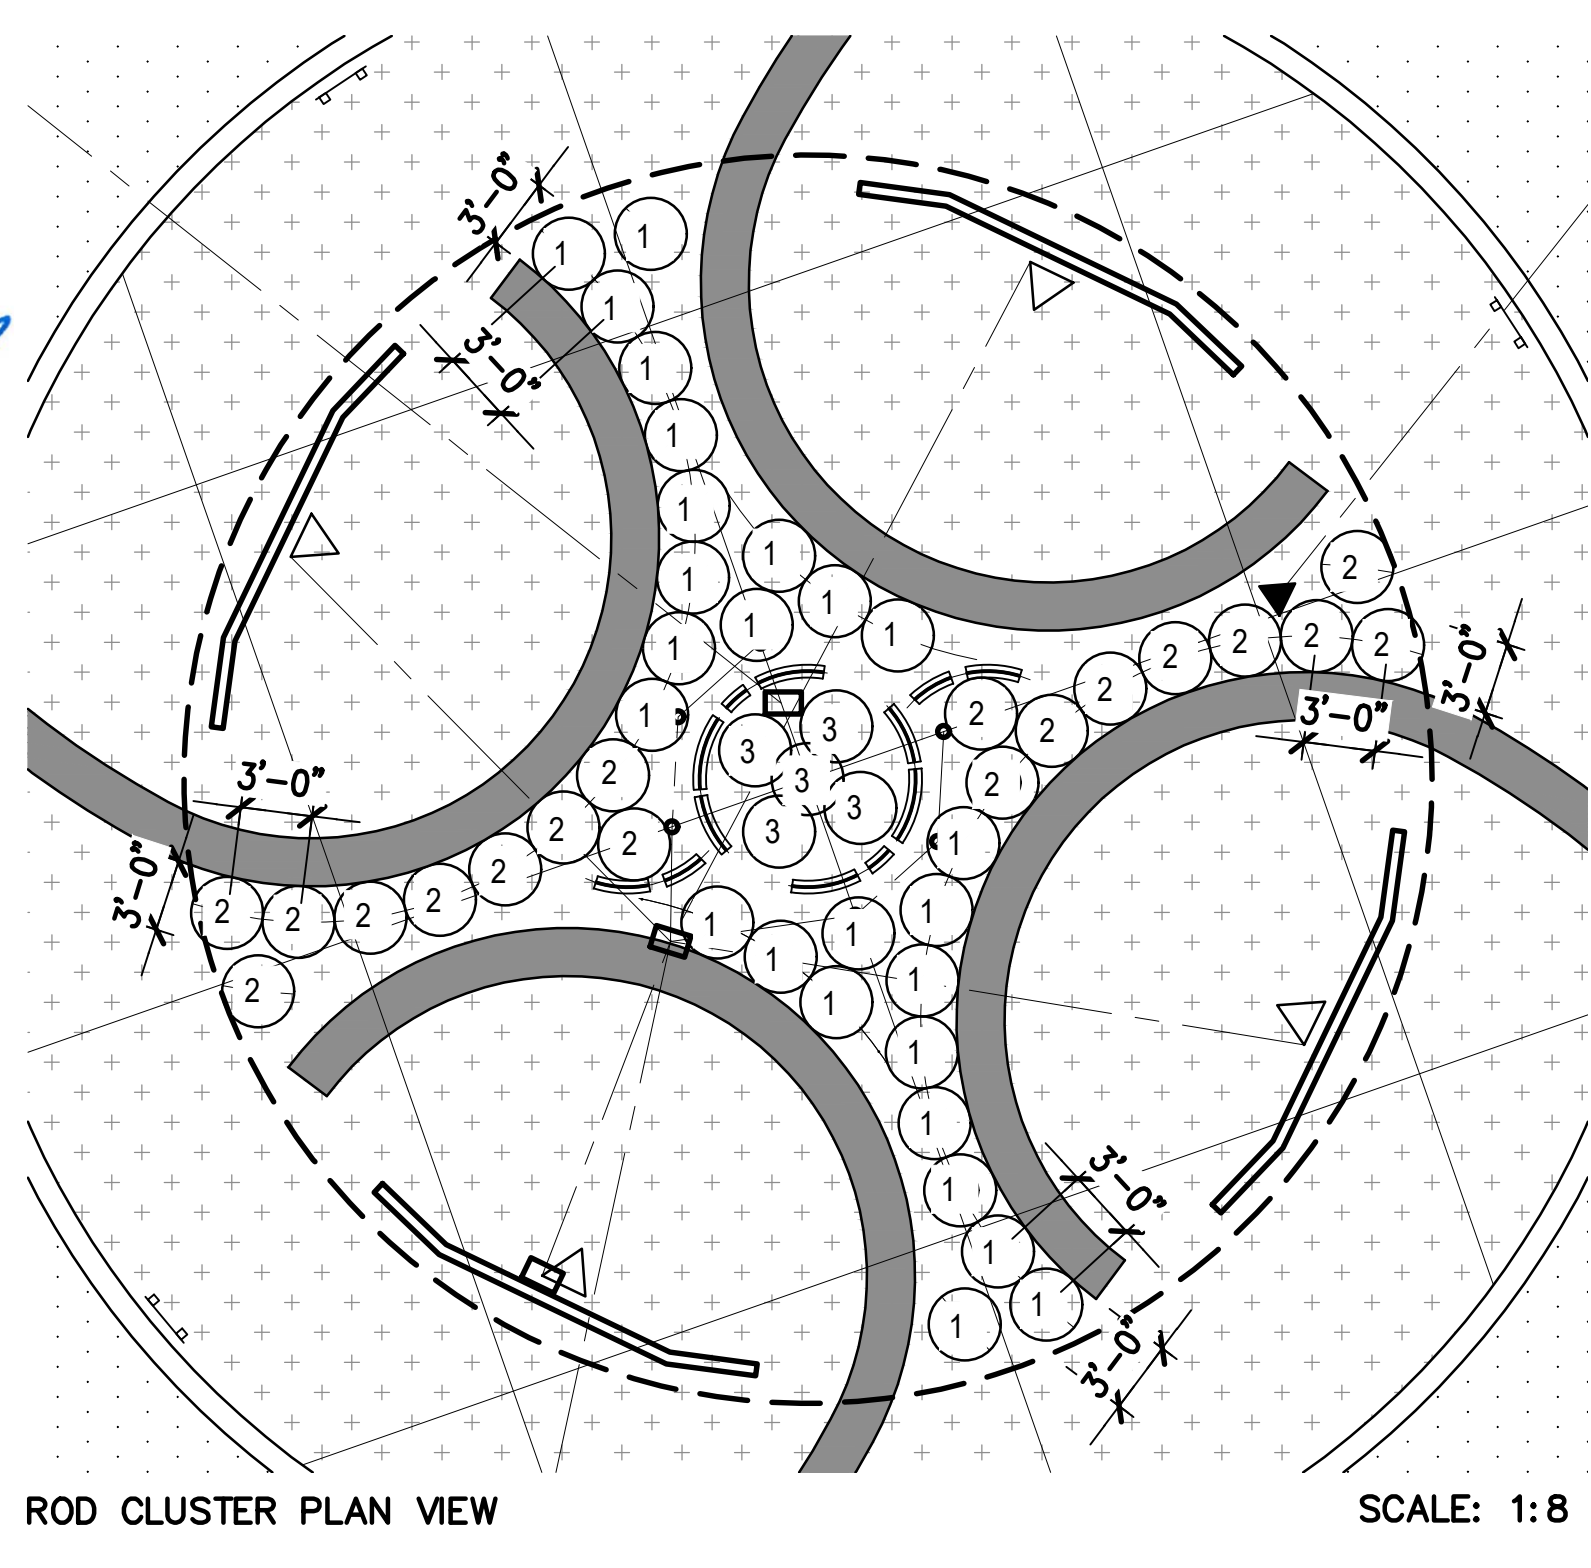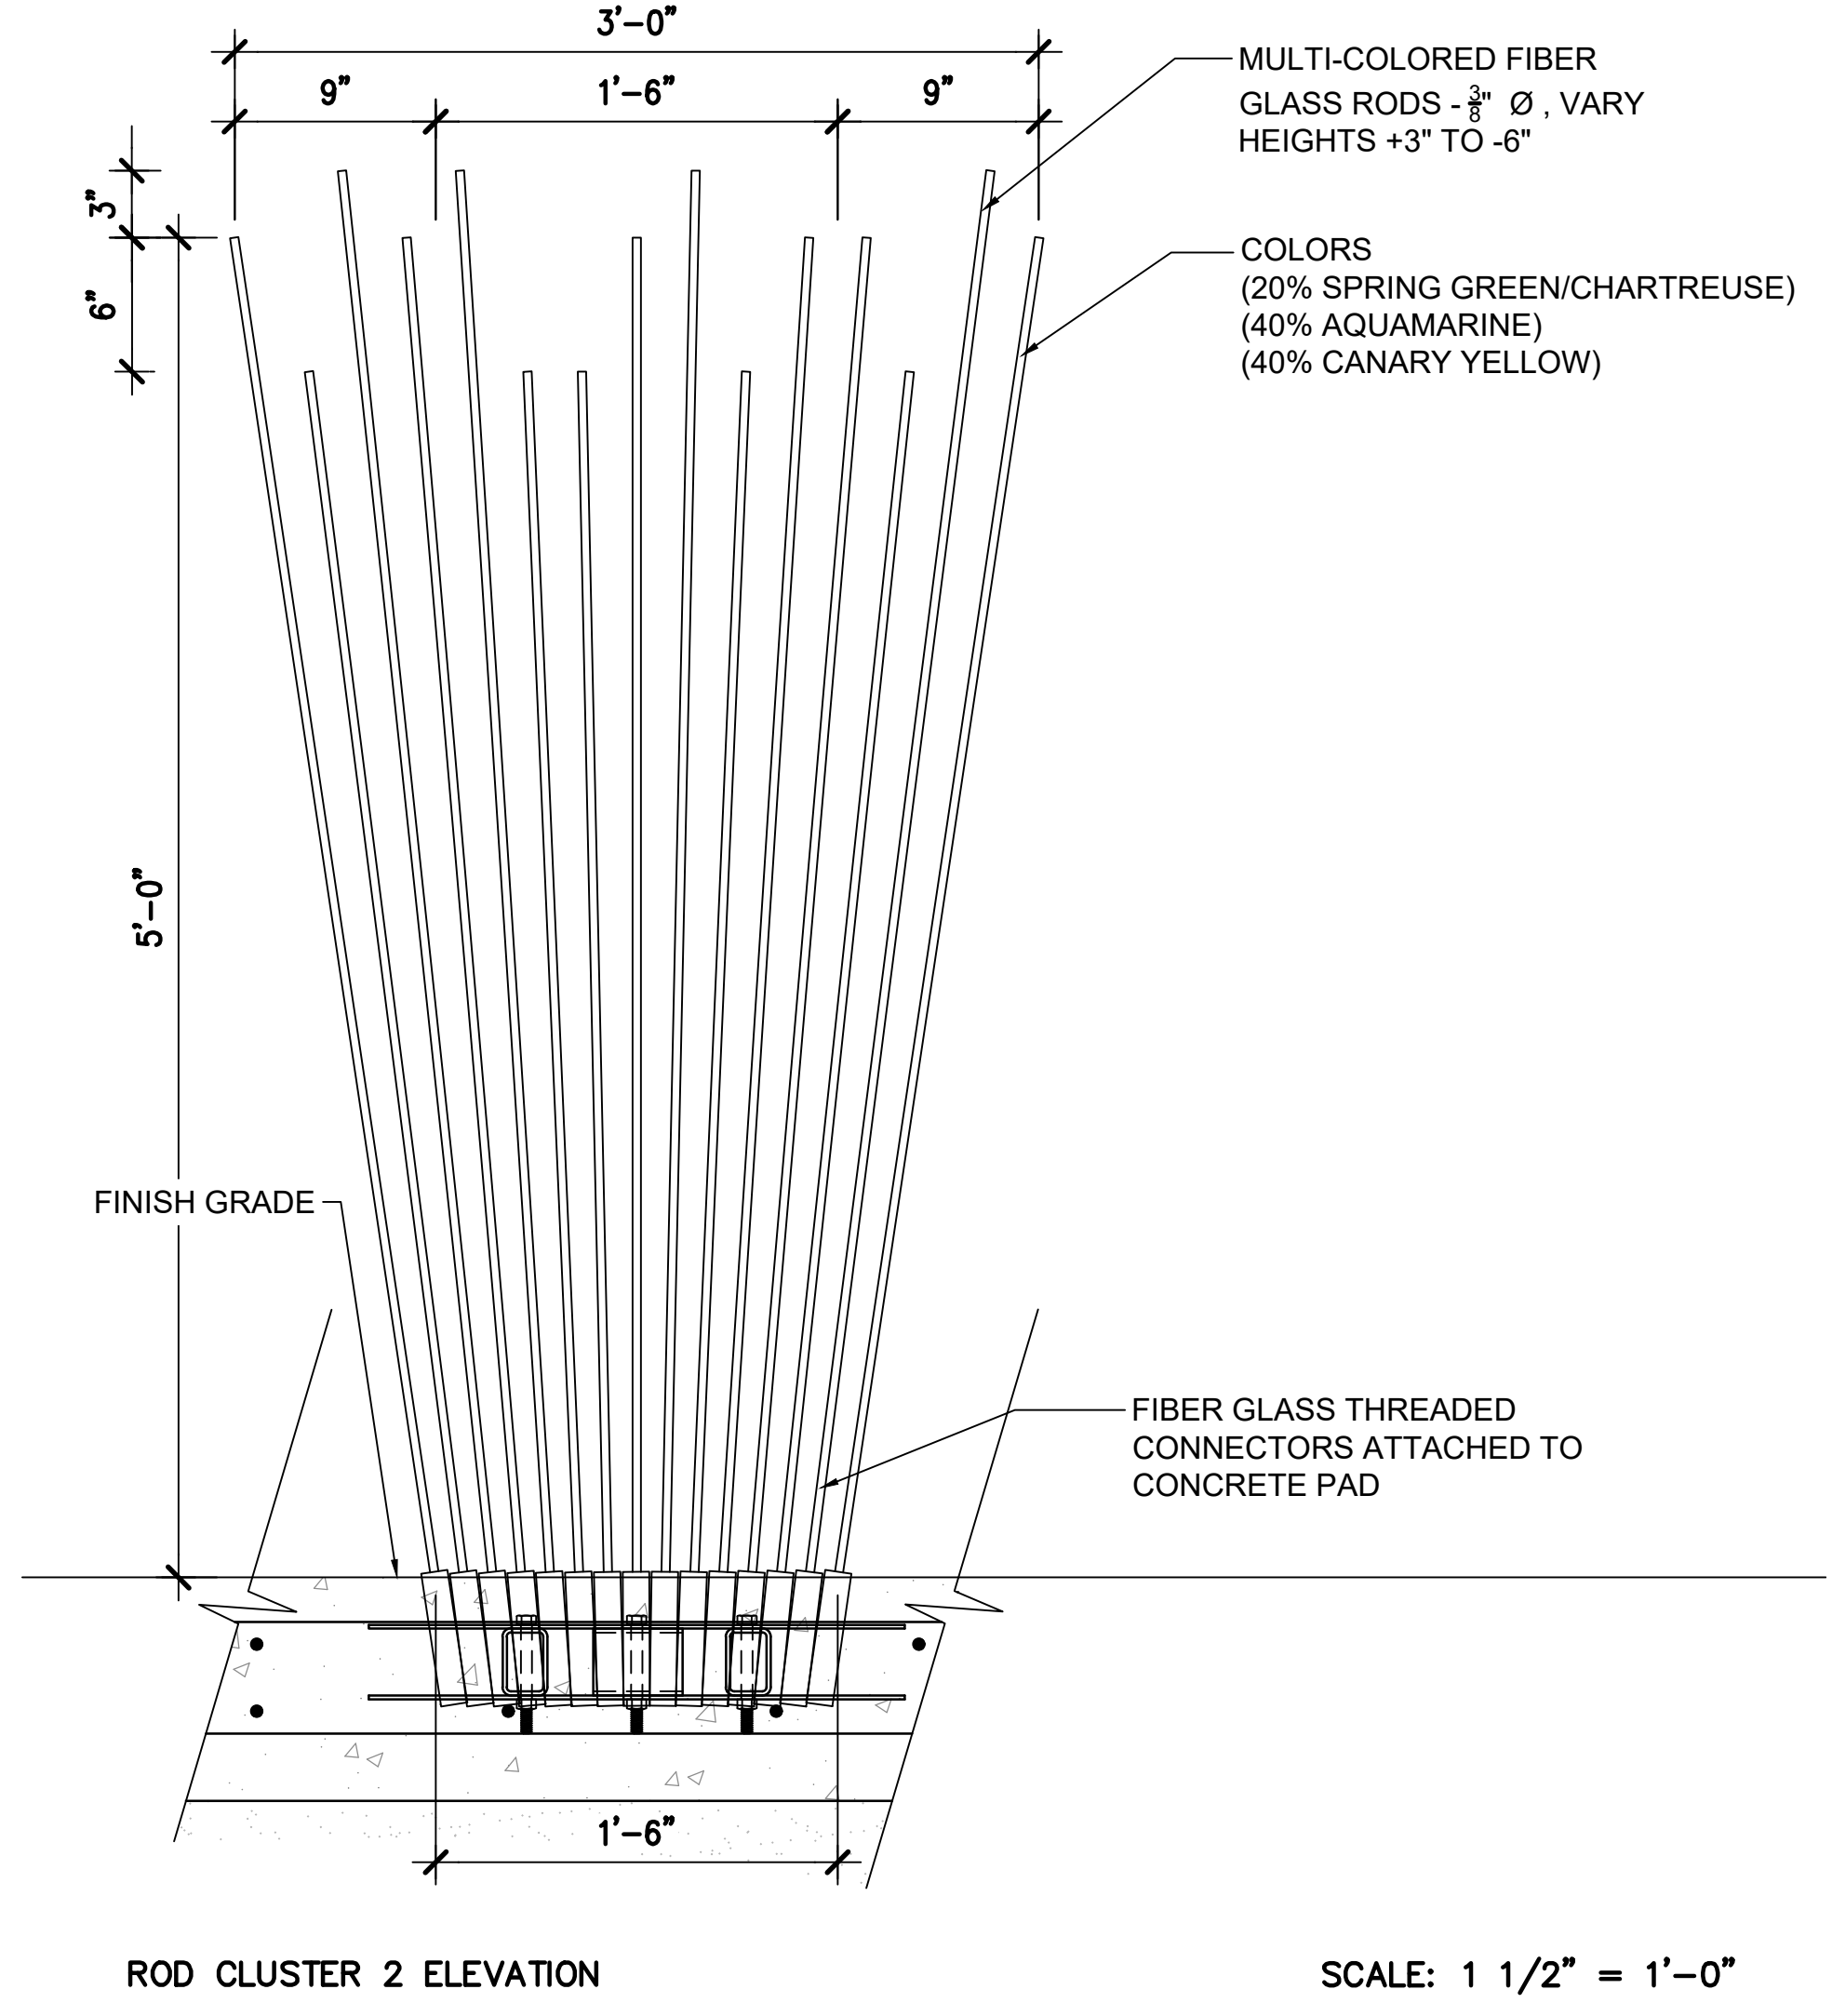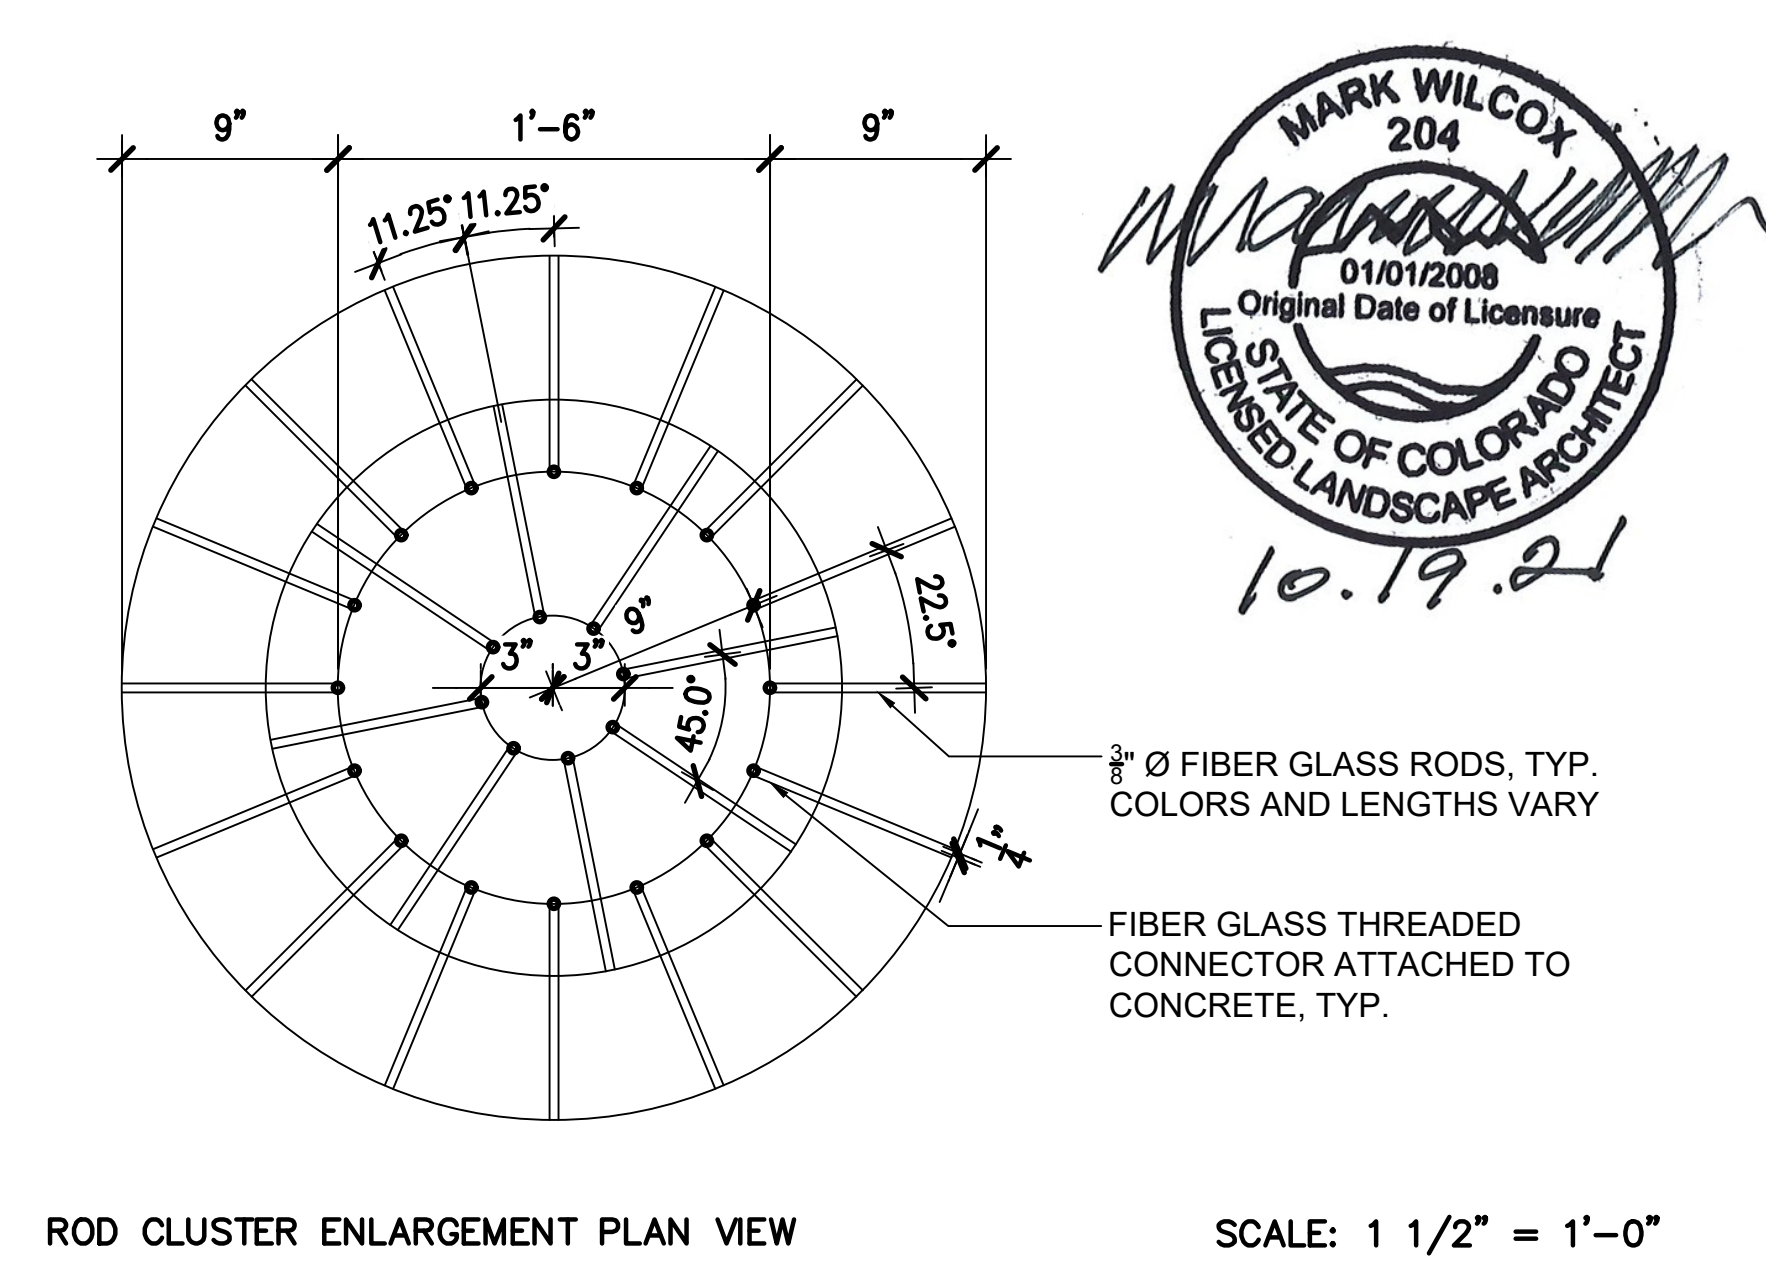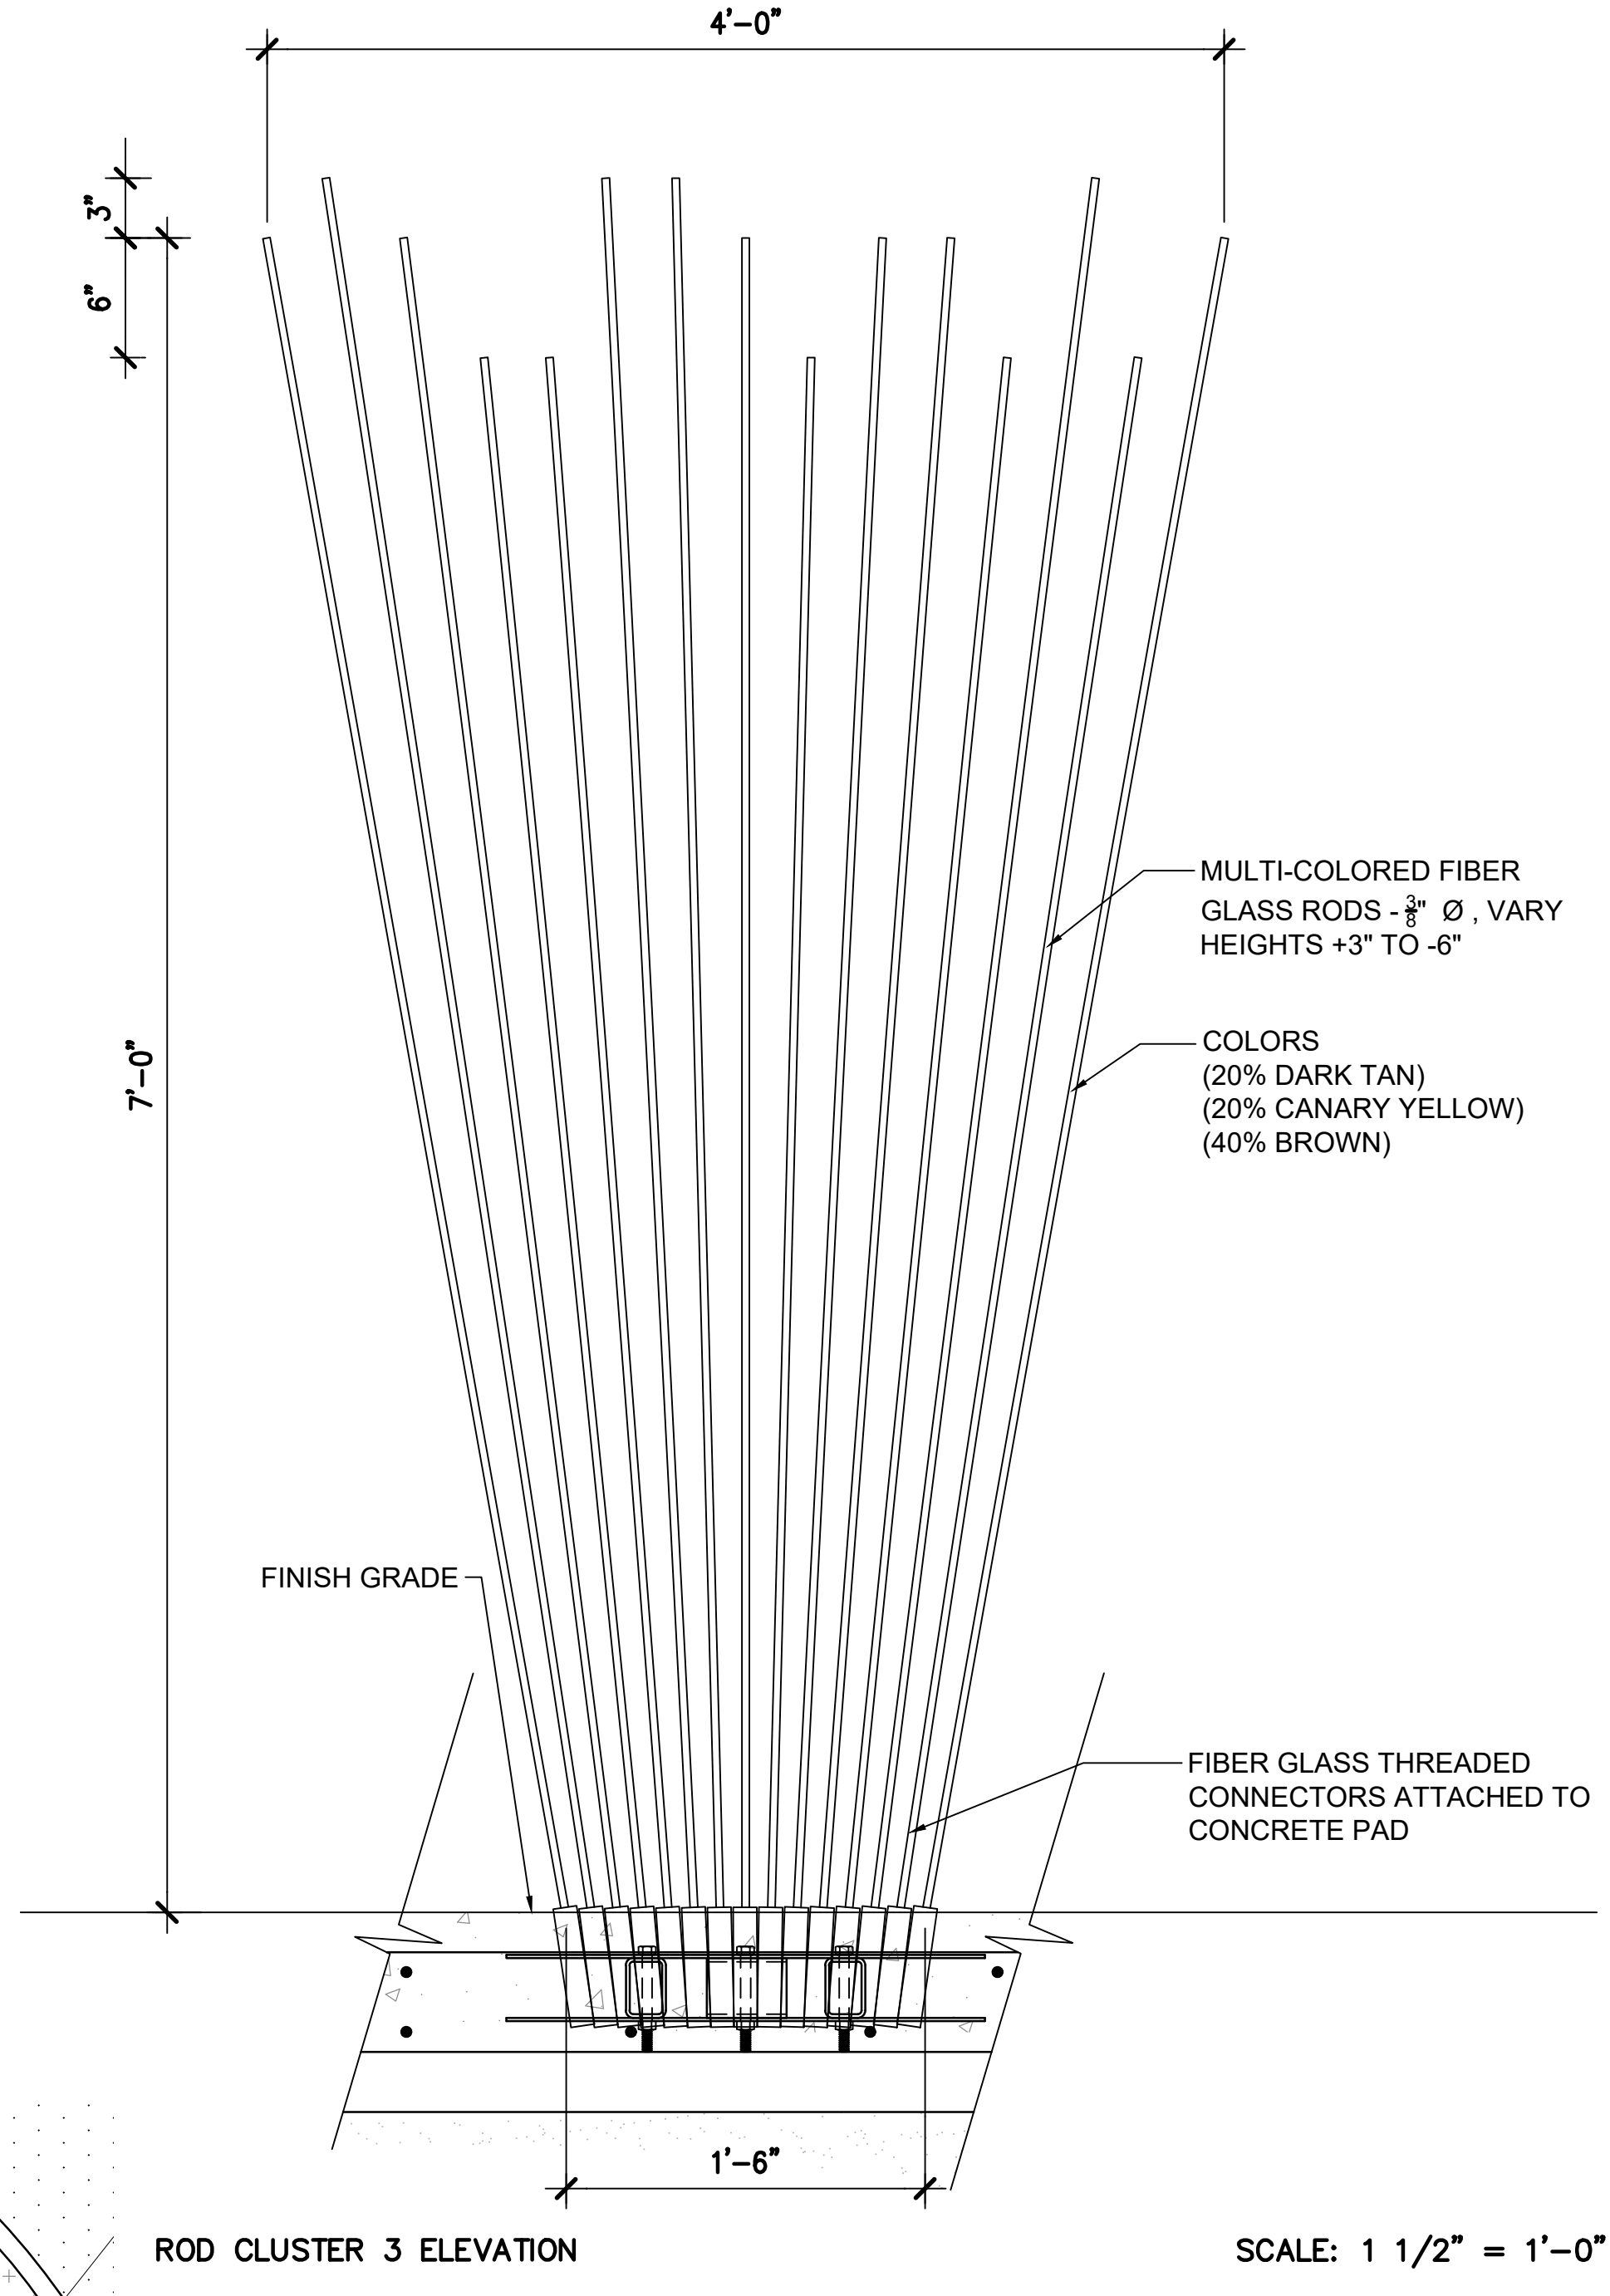

MAKES:
1. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P1.dwg
2. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P2.dwg
3. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P3.dwg
4. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P4.dwg
5. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P5.dwg
6. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P6.dwg
7. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P7.dwg
8. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P8.dwg
9. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P9.dwg
10. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P10.dwg
11. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P11.dwg
12. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P12.dwg
13. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P13.dwg
14. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P14.dwg
15. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P15.dwg
16. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P16.dwg
17. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P17.dwg
18. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P18.dwg
19. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P19.dwg
20. V:\11_2021_2021\11-2021-01-18_Markings_Concrete\ADCO-124thAveRoundabout\Sheet_P20.dwg

1A) FIBER GLASS RODS

- FIBER GLASS RODS BY OTHERS, INC. SCULPTURE SHOWN FOR INFORMATIONAL PURPOSES ONLY. GENERAL CONTRACTOR TO COORDINATE SCHEDULE AND INSTALLATION OF ART PIECES WITH SELECTED SCULPTURE FABRICATOR. FOUNDATION DESIGNS INCLUDING CONCRETE (REBAR, ROD CLUSTER, PLATE ANCHORS, EMBED PLATES AND THREADED CONNECTORS) TO BE INSTALLED BY GENERAL CONTRACTOR PRIOR TO SCULPTURE INSTALLATION, FINAL FOUNDATION DESIGNS TO BE CONFIRMED WITH SCULPTURE FABRICATOR AND OWNER.
- GENERAL CONTRACTOR TO PROVIDE FINAL DESIGNS, THICKNESS, ETC. BASED ON COUNTY'S CURRENT BUILDING CODE FOR WIND LOADS, ETC.
- SEE SHEET SD-1 FOR BASIS OF DESIGN MATERIAL PROPERTIES AND CORROSION PROPERTIES FOR STEEL MATERIALS, REINFORCING MATERIALS AND CONCRETE MIX.
- EMBED PLATES ARE INTENDED TO HOLD RODS TOGETHER AND PROVIDE ANCHORAGE WITH PLATES EMBEDDED INTO THE CONCRETE SLAB.